

REVIEW ARTICLE

A Comprehensive Review on Architecture, Channel Intelligence, and Autonomous Optimization of AI-Native Communication Systems for 6G Networks

Mehdi Gheisari ^{a,b,c,*}, Jafar A. Alzubi ^d, Zahra Shirmohammadi ^e, Seyed Danial Naghavi Sadat ^f, Sahar Valizadeh, ^g, Roghayeh Rezaei, ^h, Sara Abou Chakra ^{i,*}

^aInstitute of Artificial Intelligence, Shaoxing University, 508 West Huancheng Road, Yuecheng District, Zhejiang, 312000, China.

^bDepartment of R&D, Shenzhen BKD Co LTD, Huibei Road, Kengzi Subdistrict, Pingshan District, Shenzhen, China.

^cDepartment of Computer Engineering, Shi.C., Islamic Azad University, Shiraz, Iran.

^dProfessor, Faculty of Engineering, Al-Balqa Applied University, Al-Salt, 19117, Jordan.

^eAssociate Professor, Dept of Computer Systems Architecture, Shahid Rajaei Teacher Training University, Lavizan, Tehran, Iran.

^fDepartment of Computer Engineering, University of Shahrood, Shahrud, Semnan, Iran.

^gDepartment of Computer Science, University of Bojnord, Bojnord, Iran.

^hDepartment of Computer Engineering, National University of Skills, Malayer, Iran.

ⁱProfessor of Electronics and Communications Engineering, Lebanese University Faculty of Technology, Saida, Lebanon.

Abstract

The evolution of sixth-generation (6G) wireless communication systems demands a paradigm shift from conventional model-driven architectures to intelligent, data-driven, and autonomous communication frameworks. Traditional communication systems, which rely on predefined models and static optimization strategies, are inadequate for highly dynamic and heterogeneous 6G environments characterized by ultra-high data rates, sub-millisecond latency, and massive connectivity. To address these challenges, this paper presents a comprehensive review and unified framework for AI-native communication systems, where artificial intelligence is deeply embedded into the communication stack as a fundamental design principle. The framework integrates three core components: (i) channel intelligence based on deep learning and Transformer models for accurate estimation and proactive prediction, (ii) distributed learning using federated architectures for scalable and privacy-preserving intelligence, and (iii) reinforcement learning-based autonomous optimization for dynamic resource allocation under multi-objective constraints. A mathematical formulation is developed to model quality of experience, energy efficiency, and constrained optimization using Markov decision processes. The paper further identifies key challenges related to scalability, model generalization, computational complexity, and security, and outlines future research directions including semantic communication and digital twin-enabled optimization. Overall, this work establishes AI-native communication as a foundational paradigm for enabling intelligent, self-optimizing, and fully autonomous 6G wireless networks.

Keywords: Sixth-generation (6G), Wireless communication, AI-native networks, Channel intelligence, Deep learning, Transformer models, Autonomous optimization, Semantic communication, Digital twin, Edge intelligence, QoE optimization.

Article information:

ISSN: 3049-3102 (Online)

Published by: **Krrish Scientific Publications Pvt. Ltd.**

DOI: <https://doi.org/10.71426/jmt.v3.i1.pp420-434>

Received: 26 Apr. 2026 | Revised: 15 Jun. 2026 | Accepted: 17 Jun. 2026 | Published: 18 Jun. 2026

Copyright ©2026 Author(s).

This is an open-access article distributed under the terms of the [Creative Commons Attribution-NonCommercial 4.0 International License \(CC BY-NC 4.0\)](https://creativecommons.org/licenses/by-nc/4.0/).

1. Introduction

The evolution of wireless communication systems toward 6G networks represents a paradigm shift from connectivity-

*Corresponding author
Email addresses: mehdi.gheisari61@gmail.com,
MEHDI.gheisari@yandex.com (Mehdi Gheisari), j.zubi@bau.edu.jo
(Jafar A. Alzubi), z.shirmohammadi@gmail.com,
shirmohammadi@sru.ac.ir (Z Shirmohammadi),
Danial.Naghavi@shahroodut.ac.ir (SDN Sadat),

S.valizade2018@gmail.com, S.valizadeh@ub.ac.ir (S Valizadeh),
Roghayeh2000rz@proton.me (R Rezaei), sabouchakra@ul.edu.lb
(SA Chakra).

Graphical abstract: AI-Native 6G communication paradigm.

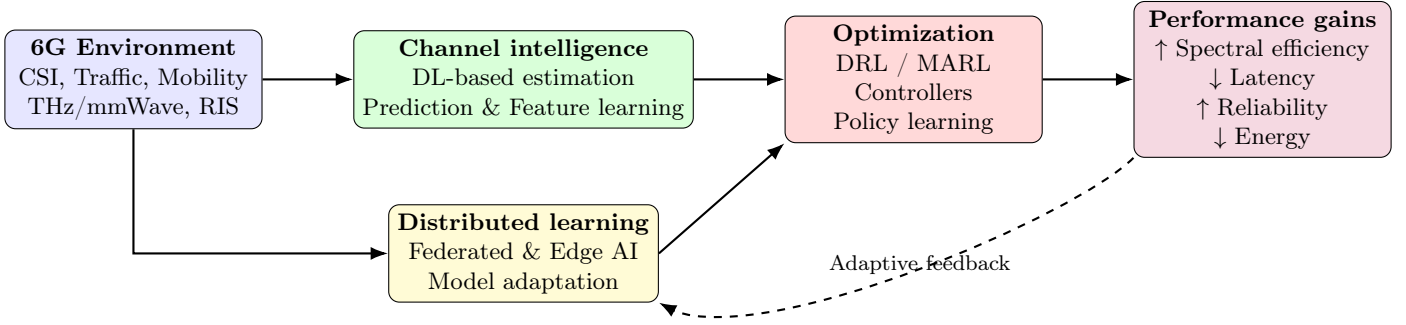


Table 1: System model and channel-state notations.

Notation	Definition	Meaning
$\mathcal{N}$	Set of network nodes	Includes user equipment, edge nodes, base stations, and cloud-assisted entities.
N	Number of nodes	Total number of participating nodes or agents.
i	Node index	Index of a specific node in $\mathcal{N}$.
t	Time index	Discrete time instant used for observation, prediction, and control.
τ	Prediction horizon	Future offset used for proactive channel prediction.
$s_i(t)$	Local state	State observed by node i at time t .
$S(t)$	Global state	Aggregated network state across all nodes.
$h_i(t)$	Channel state information	Instantaneous CSI of node i .
$\hat{h}_i(t)$	Estimated CSI	AI-estimated channel state at time t .
$\hat{h}_i(t + \tau)$	Predicted CSI	Future channel state predicted for proactive optimization.
$q_i(t)$	Queue length	Traffic load or buffer occupancy at node i .
$e_i(t)$	Energy state	Available or residual energy of node i .
$c_i(t)$	Context information	Mobility, interference, location, and environmental context.
$x_i(t)$	Input feature vector	Features used for AI-driven channel estimation and prediction.
$y_i(t)$	Pilot signal	Received pilot observation at node i .
$v_i(t)$	Mobility feature	Speed or movement characteristic of node i .
$\eta_i(t)$	Noise/interference statistics	Statistical representation of noise and interference.

Table 2: AI-driven channel intelligence and learning notations.

Notation	Definition	Meaning
$f_\theta(\cdot)$	Channel estimation model	Deep neural network used for CSI estimation.
$g_\phi(\cdot)$	Temporal prediction model	LSTM/Transformer-based model used for future CSI prediction.
θ	Estimation parameters	Trainable parameters of $f_\theta(\cdot)$.
ϕ	Prediction parameters	Trainable parameters of $g_\phi(\cdot)$.
θ_i	Local model parameters	Node-specific model parameters updated locally.
$\theta^{(r)}$	Global model	Federated model at communication round r .
$\theta^{(r+1)}$	Updated global model	Aggregated model after communication round r .
r	FL round index	Communication round index in federated learning.
w_i	Aggregation weight	Weight assigned to local model θ_i .
$\mathcal{L}_{\text{chan}}$	Channel loss	Mean-squared CSI estimation error.
$\mathcal{L}_{\text{est}}$	Estimation loss	Supervised loss for channel estimation.
$\mathcal{L}_{\text{unc}}$	Uncertainty loss	Loss used to account for probabilistic prediction uncertainty.
$\mathcal{L}_i$	Local loss	Combined local estimation and uncertainty loss.
$\mu_i(t)$	Prediction mean	Expected value of predicted CSI.
$\sigma_i^2(t)$	Prediction variance	Variance of predicted CSI uncertainty.
$\sigma_i(t)$	Uncertainty term	Standard-deviation-based risk term used in reward design.
$\mathcal{U}(\cdot)$	Uncertainty operator	Function estimating prediction mean and variance.
Q, K, V	Query, key, value	Transformer self-attention matrices.
d_k	Key dimension	Scaling term in attention computation.
$\text{softmax}(\cdot)$	Softmax function	Normalization function used in attention.
$\mathcal{N}(\mu_i, \sigma_i^2)$	Gaussian distribution	Probabilistic model of channel prediction uncertainty.

Table 3: QoE, energy, reinforcement learning, and constrained optimization notations.

Notation	Definition	Meaning
$QoE_i(t)$	Quality of Experience	User-centric communication quality metric.
$R_i(t)$	Achieved data rate	Throughput achieved by node i .
$D_i(t)$	End-to-end latency	Communication delay experienced by node i .
$U_i(t)$	Reliability metric	Successful transmission probability or reliability level.
α	Throughput/QoE weight	Weight associated with rate or QoE contribution.
β	Delay/energy penalty weight	Weight associated with latency or energy penalty.
γ	Reliability weight	Used as reliability weight in QoE or discount factor in RL.
$B_i(t)$	Allocated bandwidth	Bandwidth assigned to node i .
B_{total}	Total bandwidth	Network-wide bandwidth budget.
$P_i(t)$	Transmission power	Power allocated to node i .
P_{max}	Maximum power	Upper bound on transmission power.
N_0	Noise spectral density	Thermal noise term used in achievable-rate modeling.
$E_i(t)$	Energy consumption	Total energy consumed by node i .
$T_i(t)$	Transmission duration	Time period used for wireless transmission.
$E_i^{\text{comp}}(t)$	Computation energy	Energy consumed by AI inference or training.
π	Policy	Resource allocation and control policy.
π^*	Optimal policy	Policy maximizing expected cumulative reward.
$\pi_i(t)$	Beamforming decision	Scheduling or beam-selection decision at node i .
$\pi_i(a_i s_i)$	Local policy	Probability of selecting action a_i under state s_i .
$a_i(t)$	Action	Resource allocation decision of node i .
$\mathcal{M}$	MDP	Markov Decision Process for autonomous optimization.
$\mathcal{S}$	State space	Set of possible network states.
$\mathcal{A}$	Action space	Set of possible optimization actions.
$\mathcal{P}$	Transition probability	Probability of state transition.
$\mathcal{R}$	Reward function	RL reward used for policy learning.
$r(t)$	Global reward	Aggregate reward over the network.
$r_i(t)$	Local reward	Reward obtained by node i .
$R(\pi)$	Expected reward	Expected cumulative reward under policy π .
$C(\pi)$	Constraint cost	Energy, delay, or resource cost under policy π .
C_{max}	Cost limit	Maximum allowable cost in CMDP.
$C_k(\pi)$	Constraint function	Individual QoS/resource constraint indexed by k .
C_k^{max}	Constraint threshold	Upper bound for constraint k .
λ	Lagrangian multiplier	Penalty coefficient for constraint handling.
δ	Uncertainty penalty	Risk-aware weight penalizing channel uncertainty.
Δ_{TD}	TD error	Temporal-difference error for critic update.
$V_{\omega}(s)$	Value function	Expected long-term reward of state s .
ω	Critic parameters	Trainable parameters of the value network.
η	Learning rate	Step size for gradient-based model updates.
$J(\theta)$	Policy objective	Objective optimized by the actor network.
$\mathbb{E}[\cdot]$	Expectation	Statistical expectation over states, policies, and transitions.
$\ \cdot\ ^2$	Squared norm	Error magnitude used in loss functions.
∇	Gradient operator	Used for learning-based parameter updates.
$\log_2(\cdot)$	Base-2 logarithm	Used in achievable-rate expression.

centric architectures to intelligence-driven communication ecosystems. The vision of 6G encompasses ultra-high data rates in the terabit-per-second range, sub-millisecond latency, ultra-reliable communication, and seamless integration of heterogeneous devices and services [1], [3], [50]. These requirements are driven by emerging applications such as holographic communication, extended reality (XR), autonomous transportation, and large-scale cyber-physical systems, which demand unprecedented levels of performance and reliability [2], [48], [49].

A key challenge in realizing 6G systems lies in the

increasing complexity and heterogeneity of wireless environments. Future networks are expected to operate across multiple frequency bands, including sub-6 GHz, millimeter-wave, and terahertz spectra, while supporting ultra-dense deployments and highly dynamic mobility patterns [12], [47]. In addition, technologies such as reconfigurable intelligent surfaces (RIS) and ultra-dense network architectures further complicate channel modeling and resource management [13], [14], [44]. Traditional communication system designs, which rely on simplified mathematical models and static optimization techniques, are insufficient to handle

List of acronyms.

Acronym	Expansion
DNN	Deep Neural Network
RNN	Recurrent Neural Network
LSTM	Long Short-Term Memory
GRU	Gated Recurrent Unit
RL	Reinforcement Learning
MARL	Multi-Agent Reinforcement Learning
FL	Federated Learning
CSI	Channel State Information
QoE	Quality of Experience
QoS	Quality of Service
RIS	Reconfigurable Intelligent Surface
mmWave	Millimeter Wave
MIMO	Multiple Input Multiple Output
UAV	Unmanned Aerial Vehicle
URLLC	Ultra-Reliable Low-Latency Communication
eMBB	Enhanced Mobile Broadband
mMTC	Massive Machine-Type Communication
O-RAN	Open Radio Access Network
RAN	Radio Access Network
NFV	Network Function Virtualization
MEC	Multi-access Edge Computing
CMDP	Constrained Markov Decision Process
MDP	Markov Decision Process
CSI-RS	Channel State Information Reference Signal
SINR	Signal-to-Interference-plus-Noise Ratio
SNR	Signal-to-Noise Ratio
BER	Bit Error Rate
SE	Spectral Efficiency
KPI	Key Performance Indicator
FPGA	Field Programmable Gate Array
ASIC	Application Specific Integrated Circuit
API	Application Programming Interface
TCP	Transmission Control Protocol
UDP	User Datagram Protocol
NOMA	Non-Orthogonal Multiple Access
OFDM	Orthogonal Frequency Division Multiplexing
CSI Feedback	Channel State Information Feedback
DQN	Deep Q-Network

the nonlinear and time-varying characteristics of such environments [26], [27], [53]–[56].

To address these challenges, Artificial Intelligence (AI) has emerged as a key enabler for next-generation wireless communication systems. AI techniques have been successfully applied to various problems, including channel estimation, interference mitigation, traffic prediction, and resource allocation [36]–[38]. However, most existing approaches follow an AI-assisted paradigm, where machine learning models are applied as external tools to optimize specific components of the communication system. Such approaches are inherently limited in their ability to support real-time, scalable, and fully autonomous network operation [4], [5].

In contrast, the concept of *AI-native communication systems* has recently gained significant attention as a fundamental design paradigm for 6G networks. In AI-native systems, intelligence is embedded directly into the communi-

cation architecture, enabling joint optimization of physical layer operations, medium access control, and network-level decision-making [9], [10]. This paradigm enables real-time learning, predictive control, and adaptive resource management, transforming wireless networks from reactive systems into proactive and self-evolving entities [6].

A central component of AI-native communication is *channel intelligence*, which leverages deep learning models to capture complex propagation characteristics and predict channel states in dynamic environments [15]. Data-driven channel estimation and prediction techniques enable proactive resource allocation, beam management, and mobility handling, significantly improving spectral efficiency and system reliability. Furthermore, emerging concepts such as semantic communication aim to transmit meaningful information rather than raw data, thereby reducing communication overhead and improving efficiency [31], [33], [34].

Another critical aspect of AI-native communication systems is *autonomous optimization*, which enables dynamic adaptation of network resources with minimal human intervention. Reinforcement learning and multi-agent learning frameworks provide powerful tools for optimizing spectrum allocation, power control, and network slicing under dynamic constraints [21]. These approaches enable continuous learning and adaptation in highly dynamic environments, supporting efficient and scalable network operation.

Despite these advancements, several open challenges remain in the realization of AI-native 6G systems [39], [40]. These include the scalability of distributed learning frameworks, generalization of AI models in non-stationary environments, computational and energy overhead, and the lack of standardized interfaces for integrating AI into communication systems [17], [18], [41]. Additionally, security and privacy concerns associated with distributed AI models, including adversarial attacks and data leakage, pose significant risks to system reliability [30], [32]. While existing literature provides valuable insights into individual aspects of AI in wireless communication, there is a lack of unified frameworks that integrate channel intelligence, distributed learning, and autonomous optimization into a cohesive AI-native architecture.

To address this gap, this paper presents a comprehensive review and unified framework for AI-native communication systems in 6G networks. All the mathematical notations used in this work, their definitions and meanings are given in Tables 1, 2 and 3. The key contributions are as follows:

- A systematic review of AI-native communication paradigms and enabling technologies.
- A unified architectural framework integrating channel intelligence, distributed learning, and autonomous optimization.
- Mathematical insights into AI-driven channel modeling and reinforcement learning-based optimization.
- Identification of key challenges and future research directions for AI-native 6G systems.

2. Related work

The role of AI in wireless communication has evolved from task-specific enhancements to a foundational design

paradigm for next-generation networks. In the context of 6G, this evolution is characterized by the transition from AI-assisted communication toward fully AI-native systems, where intelligence is embedded across all layers of the communication stack. This section critically reviews the existing literature by categorizing prior work into five key domains: (i) AI-assisted versus AI-native communication, (ii) distributed and edge intelligence, (iii) reinforcement learning-based autonomous optimization, (iv) channel intelligence and intelligent environments, and (v) emerging paradigms including semantic communication and digital twins.

2.1. From AI-assisted to AI-native communication

Early applications of AI in wireless networks focused on improving isolated functionalities such as channel estimation, traffic prediction, and interference mitigation using machine learning models [36], [37], [46]. While these AI-assisted approaches demonstrated measurable performance gains, they were inherently limited by their modular integration and lack of cross-layer coordination.

To overcome these limitations, recent research has introduced the concept of AI-native communication systems, where learning, inference, and optimization are deeply integrated into the communication architecture. The work in [4] highlighted the need for native AI integration in 6G networks to enable real-time adaptation and predictive control. Similarly, AI-native communication principles that unify signal processing and machine learning for end-to-end system optimization [9]. These approaches enable proactive and context-aware communication, marking a significant shift from reactive network management.

2.2. Distributed learning and edge intelligence

Scalable intelligence in 6G networks requires distributed learning frameworks capable of operating across heterogeneous and geographically dispersed devices. Federated learning has emerged as a promising solution, enabling decentralized model training without sharing raw data, thereby preserving privacy and reducing communication overhead [17]. This paradigm is particularly relevant in large-scale wireless systems involving mobile users and IoT devices.

Edge intelligence further enhances system responsiveness by bringing computation and learning closer to data sources. Park *et al.* demonstrated that edge-based AI enables low-latency decision-making and efficient resource utilization in wireless networks [19]. The authors of work [20], [42], [43] emphasized the role of edge intelligence in bridging the gap between cloud computing and real-time inference [52]. Moreover, hierarchical AI frameworks combining user equipment, edge nodes, and cloud infrastructure have been proposed to achieve scalable and coordinated intelligence [16], [18], [51].

2.3. Reinforcement learning for autonomous optimization

Autonomous resource management is a central requirement in AI-native communication systems. The RL provides a principled framework for learning optimal policies through interaction with dynamic environments [21]. Deep reinforcement learning methods, including DQN, DDPG,

and PPO, have been widely applied to optimize spectrum allocation, power control, and network scheduling [22]. Multi-agent reinforcement learning extends this capability to distributed environments, enabling cooperative decision-making among multiple network entities [23]. While classical optimization methods such as convex optimization and dynamic programming provide strong theoretical foundations [24], [25], they often lack scalability and adaptability in highly dynamic wireless environments, motivating the adoption of learning-based approaches.

2.4. Channel intelligence and intelligent environments

Accurate channel modeling is essential for reliable communication in 6G systems, particularly in high-frequency bands such as millimeter-wave and terahertz. Traditional statistical models fail to capture the nonlinear and non-stationary characteristics of modern wireless environments. Deep learning-based channel estimation and prediction techniques have shown significant improvements in modeling complex propagation dynamics [11], [15].

Reconfigurable intelligent surfaces (RIS) have further transformed the wireless environment by enabling programmable control of signal propagation [13], [14]. These technologies, when integrated with AI-based channel intelligence, enable adaptive beamforming, interference management, and improved spectral efficiency. The combination of data-driven channel modeling and intelligent environments is a key enabler of AI-native communication systems.

2.5. Emerging paradigms: Semantic communication and digital twins

Semantic communication represents a paradigm shift from conventional bit-level transmission to meaning-oriented communication. By transmitting only task-relevant information, semantic communication significantly reduces bandwidth requirements while improving efficiency [33], [34]. Recent studies suggest that semantic communication will play a central role in AI-native 6G systems by aligning communication processes with application-level objectives [7], [8].

Digital twin technology has also gained attention as a powerful tool for network optimization. By creating virtual replicas of physical network components, digital twins enable real-time monitoring, simulation, and optimization of network operations [28], [29]. These models facilitate predictive control and closed-loop optimization, enhancing system reliability and adaptability.

2.6. Research gaps and limitations

Despite significant progress, several challenges remain in the development of AI-native communication systems. First, many AI-based solutions suffer from high computational complexity and energy consumption, limiting their deployment in resource-constrained environments. Second, the generalization of machine learning models in non-stationary and heterogeneous wireless environments remains an open problem. Third, issues related to interoperability, standardization, and cross-layer integration are not fully addressed in existing frameworks. Furthermore, security and privacy concerns, including adversarial

attacks and data leakage in distributed learning systems, pose serious risks to network reliability. These limitations highlight the need for unified frameworks that integrate channel intelligence, distributed learning, and autonomous optimization in a scalable and secure manner.

2.7. Summary:

The reviewed literature demonstrates a clear transition toward AI-native communication systems, supported by advancements in deep learning, edge intelligence, and reinforcement learning. However, a comprehensive and unified framework that seamlessly integrates these components remains largely unexplored. This paper addresses this gap by proposing an AI-native architecture that combines channel intelligence, distributed learning, and autonomous optimization for next-generation 6G networks.

3. AI-native system model and mathematical formulation

This section presents a unified mathematical framework for AI-native communication systems in 6G networks. The formulation integrates channel intelligence, distributed learning, and autonomous optimization into a cohesive model, enabling real-time adaptation and self-optimization across heterogeneous network environments [34], [35].

3.1. System model

We consider a multi-tier AI-native 6G network consisting of user equipment, edge nodes, base stations, and cloud intelligence. Let the network be represented as a set of nodes by (1).

$$\mathcal{N} = \{1, 2, \dots, N\} \quad (1)$$

In (1), each node $i \in \mathcal{N}$ observes a local state $s_i(t)$ at time t , defined as (2).

$$s_i(t) = \{h_i(t), q_i(t), e_i(t), c_i(t)\} \quad (2)$$

The global network state is given by (3).

$$S(t) = \bigcup_{i \in \mathcal{N}} s_i(t) \quad (3)$$

3.2. AI-driven channel intelligence model

Traditional channel models are insufficient for dynamic environments. We define a data-driven channel estimation model is written as (4).

$$\hat{h}_i(t) = f_\theta(x_i(t)) \quad (4)$$

The estimation error is minimized as (5) and to enable proactive adaptation, channel prediction is modeled as (6).

$$\mathcal{L}_{\text{chan}} = \mathbb{E} \left[\|h_i(t) - \hat{h}_i(t)\|^2 \right] \quad (5)$$

$$\hat{h}_i(t + \tau) = g_\phi(h_i(t), h_i(t - 1), \dots) \quad (6)$$

3.3. Quality of Experience (QoE) model

The QoE is defined as (7), which is a function of throughput, latency, and reliability.

$$QoE_i(t) = \alpha \cdot R_i(t) - \beta \cdot D_i(t) + \gamma \cdot U_i(t) \quad (7)$$

The achievable rate is given by (8).

$$R_i(t) = B_i(t) \log_2 \left(1 + \frac{P_i(t)h_i(t)}{N_0} \right) \quad (8)$$

3.4. Energy consumption model

Energy efficiency is critical in 6G systems. The energy consumption of node i is modeled as (9).

$$E_i(t) = P_i(t) \cdot T_i(t) + E_i^{\text{comp}}(t) \quad (9)$$

In (9), $P_i(t)$ is the transmission power, $T_i(t)$ is the transmission duration and $E_i^{\text{comp}}(t)$ is the computation energy (AI inference/training).

3.5. Multi-objective optimization problem

The objective is to jointly maximize QoE while minimizing energy consumption, given by (10) and which is subject to (11)-(13). This forms a constrained optimization problem under dynamic network conditions.

$$\max_{\pi} \mathbb{E} \left[\sum_t \sum_{i \in \mathcal{N}} (\alpha QoE_i(t) - \beta E_i(t)) \right] \quad (10)$$

$$P_i(t) \leq P_{\max}, \quad \forall i, t \quad (11)$$

$$D_i(t) \leq D_{\max}, \quad (12)$$

$$B_i(t) \leq B_{\text{total}} \quad (13)$$

3.6. Reinforcement learning formulation

The problem is modeled as a Markov Decision Process (MDP) and which is given by (14).

$$\mathcal{M} = (\mathcal{S}, \mathcal{A}, \mathcal{P}, \mathcal{R}) \quad (14)$$

The reward function ($\mathcal{R}$) is defined as (15).

$$r(t) = \sum_i (\alpha QoE_i(t) - \beta E_i(t)) \quad (15)$$

The optimal policy π^* is obtained by (16).

$$\pi^* = \arg \max_{\pi} \mathbb{E} \left[\sum_t \gamma^t r(t) \right] \quad (16)$$

3.7. Constrained Markov Decision Process (CMDP)

To enforce QoS constraints, we extend the formulation to a CMDP as (17).

$$\max_{\pi} \mathbb{E}[R(\pi)] \quad \text{s.t.} \quad \mathbb{E}[C(\pi)] \leq C_{\max} \quad (17)$$

Using Lagrangian relaxation (18):

$$\mathcal{L} = \mathbb{E}[R(\pi)] - \lambda (\mathbb{E}[C(\pi)] - C_{\max}) \quad (18)$$

Table 4: Comparative analysis of key research directions in AI-native 6G communication systems.

Research category	Adaptability	Scalability	Autonomy	Key characteristics and limitations
AI-assisted communication	Medium	Medium	Low	Applies machine learning to isolated tasks such as channel estimation and traffic prediction. Limited cross-layer integration and lacks real-time autonomous decision-making [36], [37], [46].
AI-native communication	High	High	High	Embeds intelligence across the communication stack enabling end-to-end learning, predictive control, and self-optimization. Challenges include high complexity and standardization issues [4], [9], [10].
Distributed & edge intelligence	High	High	Medium	Enables decentralized learning using federated learning and edge AI. Reduces latency and preserves privacy but introduces coordination and communication overhead [17], [19], [20].
Reinforcement learning-based optimization	Very high	Medium	High	Supports dynamic resource allocation and adaptive policy learning. Effective in non-linear environments but requires large training data and may suffer from convergence issues [22].
Channel intelligence (DL-based)	High	Medium	Medium	Utilizes deep learning for channel estimation and prediction in complex environments. Improves accuracy but depends on data availability and model generalization [11], [15].
Intelligent environments (RIS-enabled)	High	Medium	Medium	Enhances channel controllability through programmable environments. Improves signal propagation but requires hardware integration and optimization complexity [13], [14].
Semantic communication	Very High	High	High	Focuses on transmitting meaningful information instead of raw bits, significantly reducing bandwidth usage. Still in early stages with challenges in standardization [33], [34], [7].
Digital twin-based networks	High	High	High	Enables real-time simulation and predictive optimization using virtual replicas of physical systems. Computationally intensive and requires accurate modeling [28], [29].

3.8. Discussion

The proposed mathematical framework integrates AI-driven channel intelligence, multi-objective optimization, and reinforcement learning into a unified model. Unlike conventional approaches, this formulation enables real-time adaptation, predictive control, and autonomous optimization in dynamic 6G environments. The combination of QoE-aware optimization and energy-efficient learning makes the framework suitable for next-generation intelligent communication systems.

4. Channel intelligence framework in AI-native 6G networks

Channel intelligence is a cornerstone of AI-native communication systems, enabling accurate estimation, prediction, and adaptation of wireless channels in highly dynamic environments. Unlike conventional model-based approaches, AI-driven channel intelligence leverages data-driven learning to capture complex propagation characteristics, particularly in high-frequency bands such as millimeter-wave and terahertz communication.

4.1. Architecture of channel intelligence engine

The channel intelligence framework operates across multiple layers of the AI-native architecture, integrating user equipment, edge nodes, and cloud intelligence. The system follows a hierarchical structure:

- UE layer: Collects raw measurements including pilot signals, CSI, and mobility data.

- Edge layer: Performs real-time inference and local model adaptation.
- Cloud layer: Conducts global model training and aggregation.

Let the input feature vector at node i be (19).

$$x_i(t) = \{y_i(t), h_i(t-1), v_i(t), \eta_i(t)\} \quad (19)$$

The objective is to learn a mapping, the following equation 20.

$$\hat{h}_i(t) = f_\theta(x_i(t)) \quad (20)$$

4.2. Deep learning-based channel estimation

Channel estimation is formulated as a supervised learning problem. Given training samples $\{x_i(t), h_i(t)\}$, the model minimizes by using (21).

$$\mathcal{L}_{\text{est}} = \frac{1}{N} \sum_{i=1}^N \|h_i(t) - \hat{h}_i(t)\|^2 \quad (21)$$

CNNs are particularly effective for extracting spatial features from CSI matrices, while fully connected layers capture nonlinear relationships.

4.3. Temporal channel prediction using transformer models

To enable proactive network optimization, channel prediction is required. We employ a Transformer-based temporal model (22). The attention mechanism is defined as (23)

and this allows the model to capture long-range temporal dependencies in channel variations.

$$\hat{h}_i(t + \tau) = g_\phi(h_i(t), h_i(t-1), \dots, h_i(t-k)) \quad (22)$$

$$\text{Attention}(Q, K, V) = \text{softmax}\left(\frac{QK^T}{\sqrt{d_k}}\right)V \quad (23)$$

4.4. Uncertainty-aware channel prediction

Due to stochastic channel variations, uncertainty estimation is critical. We model prediction uncertainty as (24).

$$\hat{h}_i(t + \tau) \sim \mathcal{N}(\mu_i(t), \sigma_i^2(t)) \quad (24)$$

The loss function incorporates uncertainty is given by (25), which improves robustness in dynamic environments.

$$\mathcal{L}_{\text{unc}} = \sum_i \left(\frac{\|h_i - \mu_i\|^2}{\sigma_i^2} + \log \sigma_i^2 \right) \quad (25)$$

4.5. Edge-assisted distributed learning

To reduce latency and communication overhead, learning is distributed across edge nodes. Each node updates local parameters θ_i and shares them with the cloud (26).

$$\theta^{(t+1)} = \sum_{i=1}^N w_i \theta_i^{(t)} \quad (26)$$

This federated learning approach ensures scalability and privacy preservation.

4.6. Algorithm: AI-based channel intelligence

This subsection presents the operational workflow of the proposed AI-native channel intelligence framework. The Algorithm 1 integrates deep learning-based channel estimation, Transformer-based temporal prediction, uncertainty-aware modeling, and federated learning for distributed optimization. The objective is to continuously learn and predict channel states while adapting to dynamic network conditions in real time. At each time step, individual network nodes (UE/edge) collect local observations and perform channel estimation using a trained deep neural network. Temporal prediction is then carried out using sequence learning models to forecast future channel states. To ensure robustness, uncertainty estimation is incorporated into the prediction process. The learning process follows a federated paradigm, where local model updates are periodically aggregated at the cloud to form a global model, which is redistributed to all nodes.

The proposed algorithm enables continuous learning and adaptation of channel intelligence models in a distributed manner. By integrating estimation, prediction, and uncertainty modeling within a federated learning framework, the system achieves scalability, privacy preservation, and robustness. Furthermore, the predicted channel states and associated uncertainty are utilized by the reinforcement learning-based optimization module (Section 3) to enable proactive and risk-aware decision-making in dynamic 6G environments.

Algorithm 1 AI-native channel intelligence framework.

```

1 Input: Initial model parameters  $\theta$ , prediction horizon
    $\tau$ , learning rate  $\eta$ 
2 Initialize: Global model  $\theta^{(0)}$ 
3 for each global communication round  $r = 1, 2, \dots$  do
4   Distribute global model  $\theta^{(r)}$  to all nodes
5   for each node  $i \in \mathcal{N}$  in parallel do
6     Initialize local model:
        
$$\theta_i \leftarrow \theta^{(r)}$$

7     for each time step  $t$  do
8       Collect input features:
        
$$x_i(t) = \{y_i(t), h_i(t-1), v_i(t), \eta_i(t)\}$$

9       Channel estimation
        
$$\hat{h}_i(t) = f_{\theta_i}(x_i(t))$$

10      Temporal prediction
        
$$\hat{h}_i(t + \tau) = g_\phi(h_i(t), h_i(t-1), \dots)$$

11      Uncertainty modeling
        
$$(\mu_i(t), \sigma_i^2(t)) = \mathcal{U}(\hat{h}_i(t + \tau))$$

12      Loss Computation
        
$$\mathcal{L}_i = \mathcal{L}_{\text{est}} + \lambda \mathcal{L}_{\text{unc}}$$

13      Update local parameters:
        
$$\theta_i \leftarrow \theta_i - \eta \nabla \mathcal{L}_i$$

14      end for
15      Transmit updated parameters  $\theta_i$  to cloud server
16    end for
17    Federated aggregation
        
$$\theta^{(r+1)} = \sum_{i \in \mathcal{N}} w_i \theta_i$$

18  end for
19 Output: Predicted channel states  $\hat{h}_i(t + \tau)$  with un-
    certainty estimates  $(\mu_i, \sigma_i^2)$ 

```

4.7. Integration with autonomous optimization

The predicted channel $\hat{h}_i(t + \tau)$ is used by the reinforcement learning agent to make proactive decisions:

- Beamforming optimization
- Spectrum allocation
- Handover management

Figure 1 illustrates the proposed AI-driven channel intelligence framework, which integrates deep learning-based channel estimation, Transformer-based temporal prediction, uncertainty modeling, and federated learning to enable proactive and adaptive communication in 6G networks.

At the input stage, heterogeneous data sources including pilot signals, historical channel state information (CSI), user mobility patterns, and interference statistics are collected at the user equipment and edge nodes. These inputs are processed through a feature learning module, typically implemented using convolutional or deep neural networks, to extract high-dimensional representations that capture spatial correlations and nonlinear channel characteristics. This learned representation is then utilized by the channel estimation module to generate an accurate estimate of the instantaneous channel state.

To enable predictive and proactive network control, the framework incorporates a temporal prediction module based on Transformer architectures. By leveraging self-attention mechanisms, the model captures long-range temporal dependencies in channel variations and generates future channel estimates $\hat{h}(t + \tau)$. This capability is particularly critical in high-mobility and high-frequency communication scenarios, where rapid channel fluctuations can significantly degrade system performance if not anticipated in advance.

Given the inherent stochasticity of wireless channels, the framework further integrates an uncertainty modeling component that quantifies prediction confidence through probabilistic representations, typically expressed in terms of mean and variance (μ, σ^2) . This allows the system to account for prediction reliability and incorporate risk-aware decision-making in subsequent optimization stages. To ensure scalability and low-latency operation, the proposed framework adopts a federated learning paradigm, where model training is distributed across edge nodes and coordinated by a cloud-level aggregator. Local models are updated using device-specific data and periodically aggregated to form a global model, thereby preserving data privacy while enabling collaborative learning across the network. The predicted channel information, along with its associated uncertainty, is then forwarded to the autonomous optimization module, where reinforcement learning agents utilize this knowledge to perform proactive resource allocation, beamforming, and handover decisions. By integrating estimation, prediction, and learning within a unified framework, the proposed channel intelligence system enables a transition from reactive communication strategies to anticipatory and self-optimizing 6G network operation.

4.8. Discussion

The proposed channel intelligence framework combines deep learning, Transformer-based prediction, and distributed learning to address the challenges of dynamic 6G environments. Compared to traditional approaches, it enables higher estimation accuracy, proactive adaptation, and reduced latency, making it a critical component of AI-native communication systems.

5. Autonomous optimization framework in AI-native 6G networks

Autonomous optimization is a fundamental capability of AI-native communication systems, enabling dynamic and self-adaptive resource management in complex and time-varying wireless environments [45]. Unlike traditional

optimization approaches that rely on predefined models and static policies, AI-native systems leverage reinforcement learning to continuously learn optimal strategies through interaction with the environment. This section presents a unified RL-based framework for proactive and energy-efficient optimization in 6G networks.

5.1. Framework overview

The proposed autonomous optimization framework operates on top of the channel intelligence module described in Section 4. Predicted channel states $\hat{h}_i(t + \tau)$ and associated uncertainty metrics (μ_i, σ_i^2) are used as inputs to the RL agent, enabling proactive decision-making.

Each network node (or agent) observes a state as given by (27) and it and selects an action as expressed by (28).

$$s_i(t) = \{\hat{h}_i(t), q_i(t), e_i(t), \sigma_i(t)\} \quad (27)$$

$$a_i(t) = \{P_i(t), B_i(t), \pi_i(t)\} \quad (28)$$

5.2. Reward design and objective function

The reward function is defined as (29) based on the QoE-energy trade-off introduced in Section 3:

$$r_i(t) = \alpha \cdot QoE_i(t) - \beta \cdot E_i(t) - \delta \cdot \sigma_i(t) \quad (29)$$

The inclusion of uncertainty ensures robust decision-making under imperfect predictions.

5.3. Multi-Agent Reinforcement Learning (MARL)

In large-scale 6G networks, centralized optimization is infeasible due to scalability constraints. Therefore, we adopt MARL framework, where each node acts as an independent agent while coordinating with others. The joint objective is written as (30). Agents learn policies $\pi_i(a_i|s_i)$ that maximize cumulative rewards while ensuring network-wide efficiency.

$$\max_{\pi} \mathbb{E} \left[\sum_t \sum_{i \in \mathcal{N}} r_i(t) \right] \quad (30)$$

5.4. Constrained Markov Decision Process (CMDP)

To enforce QoS constraints, the optimization is modeled as a CMDP (31):

$$\max_{\pi} \mathbb{E}[R(\pi)] \quad \text{s.t.} \quad \mathbb{E}[C_k(\pi)] \leq C_k^{\max} \quad (31)$$

In (31), the constraints are:

- Latency constraint: $D_i(t) \leq D_{\max}$
- Power constraint: $P_i(t) \leq P_{\max}$
- Bandwidth constraint: $\sum_i B_i(t) \leq B_{\text{total}}$

Using Lagrangian relaxation (32):

$$\mathcal{L} = \mathbb{E}[R(\pi)] - \sum_k \lambda_k (\mathbb{E}[C_k(\pi)] - C_k^{\max}) \quad (32)$$

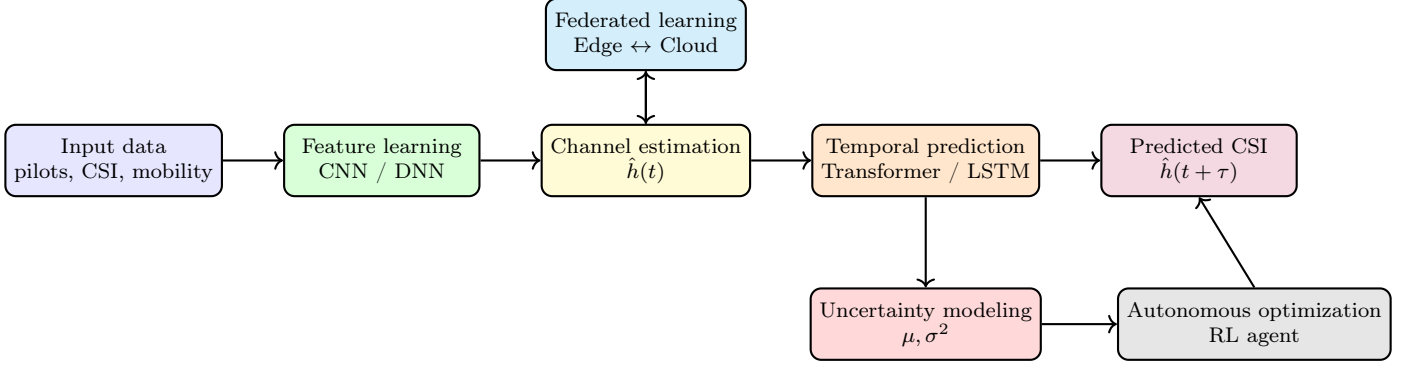


Figure 1: AI-driven channel intelligence framework for proactive 6G communication systems.

Algorithm 2 AI-native autonomous optimization framework.

Initialize policy π_θ and value function V_ω each episode each time step t Observe state $s_i(t)$ including predicted channel $\hat{h}_i(t)$ Select action $a_i(t) \sim \pi_\theta(s_i(t))$ Execute action and observe reward $r_i(t)$ and next state Store transition (s_i, a_i, r_i, s'_i) Update critic using TD-error:

$$\delta = r + \gamma V_\omega(s') - V_\omega(s)$$

Update actor using policy gradient Apply constraint penalties via Lagrangian multipliers Output optimal policy π^*

5.5. Policy optimization

The optimal policy is obtained using deep reinforcement learning:

$$\pi^* = \arg \max_{\pi} \mathbb{E} \left[\sum_t \gamma^t r(t) \right] \quad (33)$$

Actor-critic methods are particularly effective:

$$\theta \leftarrow \theta + \eta \nabla_{\theta} J(\theta) \quad (34)$$

$$\omega \leftarrow \omega - \eta \nabla_{\omega} \mathcal{L}(\omega) \quad (35)$$

5.6. Algorithm: Autonomous optimization

The proposed autonomous optimization framework enables real-time, adaptive, and scalable resource management in AI-native 6G networks. By integrating channel prediction and uncertainty-aware learning into the RL decision-making process, the system achieves proactive optimization rather than reactive control. The use of MARL further enhances scalability in ultra-dense networks, while CMDP ensures compliance with QoS constraints. Algorithm 2 shows a framework for AI-native autonomous optimization.

Compared to conventional optimization approaches, the proposed framework provides superior adaptability, robustness, and efficiency, making it a key enabler of fully autonomous and self-optimizing 6G communication systems.

6. Performance evaluation and comparative analysis

This section presents a comparative evaluation of the proposed AI-native communication framework against existing approaches across key performance dimensions. As this work is primarily a review and framework-oriented study, the evaluation is conducted through qualitative synthesis of reported results in the literature, supported by theoretical insights derived from the proposed architecture. The objective is to provide a consistent and meaningful comparison of different communication paradigms under realistic 6G scenarios.

6.1. Evaluation metrics

To ensure a structured and technically meaningful comparison, the following performance metrics are considered:

- **Spectral Efficiency (SE):** Effective utilization of available spectrum under dynamic channel conditions.
- **Latency (D):** End-to-end communication delay, critical for ultra-reliable low-latency communication (URLLC).
- **Energy Efficiency (EE):** Trade-off between communication performance and energy consumption.
- **QoE:** Composite metric defined in Section 3, incorporating throughput, delay, and reliability.
- **Adaptability:** Ability to respond to dynamic channel variations and traffic conditions.
- **Scalability:** Capability to maintain performance in large-scale distributed environments.

6.2. Comparative analysis

Table 5 presents a qualitative comparison of different communication paradigms across key performance metrics. The proposed AI-native framework demonstrates consistent advantages due to its integrated design, combining channel intelligence, distributed learning, and reinforcement learning-based optimization.

6.3. Impact of channel intelligence

Channel intelligence plays a pivotal role in enhancing system performance by enabling proactive adaptation to dynamic wireless environments. Unlike conventional estimation techniques, AI-driven channel prediction allows

Table 5: Comparative performance analysis of AI-native communication framework with existing approaches.

Approach	SE	Latency	EE	Adaptability	Scalability
Traditional optimization	Medium	High	Low	Low	Medium
AI-Assisted systems	Medium-high	Medium	Medium	Medium	Medium
RL-based optimization	High	Medium	Medium-high	High	Medium
Edge intelligence systems	High	Low	Medium-high	High	High
AI-native framework	Very high	Low	High	Very high	Very high

the system to anticipate channel variations and adjust transmission strategies accordingly.

Key benefits include:

- Improved beamforming accuracy through predictive channel modeling
- Reduction in feedback overhead due to forward channel estimation
- Enhanced link reliability in high-mobility and high-frequency scenarios

The integration of deep learning and Transformer-based models enables the capture of both spatial and temporal channel dependencies, thereby improving spectral efficiency and system robustness.

6.4. QoE-energy trade-off analysis

The proposed framework explicitly addresses the trade-off between quality of experience (QoE) and energy efficiency through a multi-objective optimization formulation. By incorporating energy-aware reward functions within the reinforcement learning framework, the system achieves a balanced trade-off between performance and resource utilization. The adaptive nature of reinforcement learning enables dynamic adjustment of transmission parameters based on real-time network conditions, ensuring efficient energy usage while maintaining high QoE levels.

6.5. Scalability and distributed learning performance

The integration of federated learning significantly enhances the scalability of the proposed AI-native framework. Compared to centralized learning approaches, the distributed architecture offers several advantages:

- Reduced communication overhead through localized model updates
- Parallel training across distributed nodes, improving efficiency
- Preservation of data privacy by avoiding raw data transmission

6.6. Analytical insights and system-level observations

The superior performance of the proposed AI-native framework can be attributed to its architectural integration. Unlike traditional and AI-assisted systems that optimize individual components independently, the proposed framework enables cross-layer intelligence, where channel prediction, uncertainty estimation, and resource optimization are jointly considered.

Specifically:

- Spectral efficiency improvements arise from predictive channel modeling and adaptive beamforming.

- Latency reduction is enabled by edge-assisted inference and decentralized decision-making.
- Energy efficiency is improved through reinforcement learning-based adaptive control strategies.
- System robustness is enhanced through uncertainty-aware modeling and risk-sensitive optimization.

These observations are consistent with established trends in deep learning-based channel estimation, reinforcement learning-based resource allocation, and edge intelligence frameworks reported in the literature.

6.7. Discussion and evaluation remarks

The comparison presented in Table 5 is based on a qualitative synthesis of reported results and theoretical analysis, rather than a uniform experimental benchmark. Therefore, the performance levels (e.g., “High”, “Very High”) should be interpreted as relative indicators of capability rather than absolute quantitative measures. Despite this, the proposed AI-native framework consistently demonstrates advantages across multiple dimensions due to its unified integration of predictive channel intelligence, distributed learning, and autonomous optimization. A comprehensive empirical validation using standardized datasets and real-world deployments remains an important direction for future work. Overall, the proposed framework represents a significant advancement toward intelligent, adaptive, and autonomous 6G communication systems.

7. Open challenges and future research directions

Despite significant advancements in AI-native communication systems, several critical challenges remain in realizing fully autonomous, scalable, and reliable 6G networks. This section outlines key open research problems and highlights promising directions for future investigation.

7.1. Scalability of distributed intelligence

One of the primary challenges in AI-native 6G systems is the scalability of distributed learning frameworks. While federated learning and edge intelligence enable decentralized model training, large-scale deployments introduce issues such as communication overhead, model divergence, and synchronization delays. Efficient aggregation strategies, adaptive communication protocols, and hierarchical learning architectures are required to ensure scalability in ultra-dense networks.

7.2. Generalization in non-stationary environments

Wireless communication environments are inherently dynamic, characterized by time-varying channels, mobility, and interference patterns. Machine learning models trained under specific conditions often fail to generalize across diverse scenarios. Developing robust and adaptive learning models that can generalize across heterogeneous environments remains a major research challenge. Techniques such as meta-learning, continual learning, and domain adaptation are promising directions to address this issue.

7.3. Computational complexity and energy overhead

The integration of deep learning and reinforcement learning introduces significant computational and energy overhead, particularly for resource-constrained devices. Real-time inference requirements further exacerbate this challenge. Future research should focus on lightweight model architectures, model compression techniques, and hardware-aware optimization to enable efficient deployment of AI models in edge devices.

7.4. Standardization and interoperability

The lack of standardized frameworks for integrating AI into communication systems poses a significant barrier to large-scale deployment. Current approaches are often vendor-specific and lack interoperability across different network components. Developing standardized interfaces, protocols, and architectural guidelines for AI-native communication systems is essential for enabling seamless integration and widespread adoption.

7.5. Security, privacy, and trust

The adoption of AI-native architectures introduces new security and privacy challenges. Distributed learning frameworks are vulnerable to adversarial attacks, data poisoning, and model inversion attacks. Ensuring secure and trustworthy AI models requires the development of robust defense mechanisms, including secure aggregation, differential privacy, and adversarial training techniques. Additionally, explainable AI methods are needed to enhance transparency and trust in autonomous decision-making systems.

7.6. Integration of semantic communication

Semantic communication represents a paradigm shift from traditional bit-level transmission to meaning-oriented communication. However, several challenges remain in its practical implementation, including semantic representation learning, task-specific optimization, and compatibility with existing communication protocols. Future research should focus on developing unified semantic frameworks that can be seamlessly integrated into AI-native architectures.

7.7. Digital twin-enabled network optimization

Digital twin technology offers significant potential for real-time simulation and predictive optimization of network behavior. However, constructing accurate and scalable digital twins for large-scale 6G networks remains challenging due to the complexity of modeling dynamic environments and heterogeneous components.

7.8. Towards self-evolving autonomous networks

The ultimate vision of AI-native communication systems is to enable fully self-evolving networks capable of autonomous learning, adaptation, and optimization. Achieving this vision requires the integration of multiple AI paradigms, including reinforcement learning, distributed intelligence, and self-supervised learning. Future research should focus on developing unified frameworks that enable continuous learning and adaptation without human intervention. The realization of AI-native 6G networks requires addressing challenges related to scalability, generalization, efficiency, standardization, and security. Advances in lightweight AI models, robust learning techniques, semantic communication, and digital twin technologies will play a critical role in enabling fully autonomous and intelligent communication systems. The proposed framework in this paper provides a foundation for exploring these directions and guiding future research toward practical implementation.

8. Conclusion

This paper presented a comprehensive review and unified framework for AI-native communication systems in 6G networks, addressing the growing need for intelligent, adaptive, and autonomous wireless communication architectures. Unlike conventional approaches that treat artificial intelligence as an auxiliary optimization tool, the proposed AI-native paradigm embeds intelligence directly into the communication stack, enabling real-time learning, predictive channel intelligence, and autonomous resource management. The study systematically integrated three core components—channel intelligence, distributed learning, and reinforcement learning-based autonomous optimization—into a cohesive framework. The channel intelligence module leverages deep learning and Transformer-based models to achieve accurate channel estimation and proactive prediction, while uncertainty-aware modeling enhances robustness under dynamic conditions. The distributed learning framework, based on federated learning, ensures scalability and privacy preservation across edge-enabled environments. Furthermore, the reinforcement learning-driven optimization module enables adaptive and proactive decision-making, effectively balancing QoE and energy efficiency under dynamic network constraints.

Declarations and ethical statements

Conflict of interest: The authors declare that there is no conflict of interest.

Funding statement: The authors declare that no specific funding was received for this research.

Artificial Intelligence usage statement: During the preparation of this manuscript, the authors utilized AvalAI (<https://avalai.ir/>) solely for language refinement and grammatical corrections. The authors carefully reviewed and revised the generated content and take full responsibility for the accuracy, integrity, and originality of the final manuscript.

Availability of data and materials: All data and information used in this work were obtained from publicly

available published literature and cited sources.

CRedit authorship contribution statement

Mehdi Gheisari: Conceptualization, Investigation, Writing – review & editing. **Jafar A. Alzubi:** Conceptualization, Validation, Editing & Data collection. **Zahra Shirmohammadi:** Conceptualization, Validation & Data collection. **Seyed Danial Naghavi Sadat:** Data curation & Visualization. **Sahar Valizadeh:** Data curation & Visualization. **Roghayeh Rezaei:** Data curation & Visualization. **Sara Abou Chakra:** Conceptualization, Investigation, Editing & Validation.

Publisher's note

Krrish Scientific Publications Pvt. Ltd. and the **Journal of Modern Technology** remain neutral with regard to jurisdictional claims in published maps and institutional affiliations.

References

- [1] Saad W, Bennis M, Chen M. A Vision of 6G Wireless Systems: Applications, Trends, Technologies, and Open Research Problems. *IEEE Network*. 2020;34(3):134–142. Available from: <https://doi.org/10.1109/MNET.001.1900287>
- [2] Yang H, Alphones A, Xiong Z, Niyato D, Zhao J, Wu K. Artificial Intelligence-Enabled Intelligent 6G Networks. *IEEE Network*. 2020 Oct 23;34(6):272–80. Available from: <https://doi.org/10.1109/MNET.011.2000195>
- [3] Zhang Z, Xiao Y, Ma Z, et al. 6G Wireless Networks: Vision, Requirements, Architecture, and Key Technologies. *IEEE Vehicular Technology Magazine*. 2019;14(3):28–41. Available from: <https://doi.org/10.1109/MVT.2019.2921208>
- [4] Liu Y, He Y, Lin Y, Zhang H. Toward Native Artificial Intelligence in 6G. In *2022 IEEE International Symposium on Broadband Multimedia Systems and Broadcasting (BMSB)*, Bilbao, Spain. 2022. Available from: <https://doi.org/10.1109/BMSB5706.2022.9828649>
- [5] Hoydis J, Ait Aoudia F, Viswanathan H. Toward a 6G AI-Native Air Interface. *arXiv preprint*. 2020. Available from: <https://arxiv.org/abs/2012.08285>
- [6] Chen X, Guo Z, Wang X, Feng C, Yang HH, Han S, Wang X, Quek TQ. Toward 6G Native-AI Network: Foundation Model-Based Cloud-Edge-End Collaboration Framework. *IEEE Communications Magazine*. 2025 Jul 30;63(8):23–30. Available from: <https://doi.org/10.1109/MCOM.001.2400582>
- [7] Strinati EC, Di Lorenzo P, Sciancalepore V, et al. Semantic communication for 6G: Fundamentals, challenges, and future directions. *arXiv preprint*. 2024. Available from: <https://arxiv.org/abs/2402.07573>
- [8] Getu TM, Kaddoum G, Bennis M. Semantic Communication: A Survey on Research Landscape, Challenges, and Future Directions. *Proceedings of the IEEE*. 2025 Jan 27;112(11):1649–85. Available from: <https://doi.org/10.1109/JPROC.2024.3520707>
- [9] Ibikunle F. AI-driven Optimization Techniques in Next Generation Wireless Communication Networks and Systems. *Center of Artificial Intelligence*. 2026 Jan 27;1(1). Available from: <https://doi.org/10.65591/1btq4207>
- [10] Ogenyi FC, Ugwu CN, Ugwu OP. A comprehensive review of AI-native 6G: integrating semantic communications, reconfigurable intelligent surfaces, and edge intelligence for next-generation connectivity. *Frontiers in Communications and Networks*. 2025 Sep 30;6:1655410. Available from: <https://doi.org/10.3389/frcmn.2025.1655410>
- [11] Usman Y, Vitashkevich D, Muriuki-Mureithi CA, Akl R, Chataut R. AI-Enhanced Deep Neural Network Architecture for Accurate Channel Estimation in 6G Networks. In *2025 IEEE World AI IoT Congress (AIIoT)* 2025 May 28 (pp. 0732–0736). IEEE. Available from: <https://doi.org/10.1109/AIIoT65859.2025.11105312>
- [12] Rappaport TS, Xing Y, Kanhere O, Ju S, Madanayake A, Mandal S, Alkhateeb A, Trichopoulos GC. Wireless Communications and Applications Above 100 GHz: Opportunities and Challenges for 6G and Beyond. *IEEE Access*. 2019 Jun 6;7:78729–57. Available from: <https://doi.org/10.1109/ACCESS.2019.2921522>
- [13] Björnson E, Özdogan Ö, Larsson EG. Reconfigurable Intelligent Surfaces: Three Myths and Two Critical Questions. *IEEE Communications Magazine*. 2021 Jan 1;58(12):90–6. Available from: <https://doi.org/10.1109/MCOM.001.2000407>
- [14] Amri MM, Tran NM, Choi KW. Reconfigurable Intelligent Surface-Aided Wireless Communications: Adaptive Beamforming and Experimental Validations. *IEEE Access*. 2021 Oct 29;9:147442–57. Available from: <https://doi.org/10.1109/ACCESS.2021.3124319>
- [15] Joo J, Park MC, Han DS, Pejovic V. Deep Learning-Based Channel Prediction in Realistic Vehicular Communications. *IEEE Access*. 2019 Feb 26;7:27846–58. Available from: <https://doi.org/10.1109/ACCESS.2019.2901710>
- [16] Li P, Xing Y, Li W. Distributed AI-native Architecture for 6G Networks. In *2022 International Conference on Information Processing and Network Provisioning (ICIPNP)* 2022 Sep 15 (pp. 57–62). IEEE. Available from: <https://doi.org/10.1109/ICIPNP57450.2022.00019>
- [17] Kairouz P, McMahan HB. Advances and open problems in federated learning. *Foundations and trends in machine learning*. 2021 Jun 23;14(1–2):1–210. Available from: <https://doi.org/10.1561/22000000083>
- [18] Nguyen DC, Ding M, Pathirana PN, Seneviratne A, Li J, Niyato D, Dobre O, Poor HV. 6G Internet of Things: A Comprehensive Survey. *IEEE Internet of Things Journal*. 2021 Aug 9;9(1):359–83. Available from: <https://doi.org/10.1109/JIOT.2021.3103320>
- [19] Park J, Samarakoon S, Bennis M, Debbah M. Wireless Network Intelligence at the Edge. *Proceedings of the IEEE*. 2019 Nov 1;107(11):2204–39. Available from: <https://doi.org/10.1109/JPROC.2019.2946408>
- [20] Zhou Z, Chen X, Li E, Zeng L, Luo K, Zhang J. Edge Intelligence: Paving the Last Mile of Artificial Intelligence With Edge Computing. *Proceedings of the IEEE*. 2019 Jun 12;107(8):1738–62. Available from: <https://doi.org/10.1109/JPROC.2019.2918951>
- [21] Sutton RS, Barto AG. Reinforcement Learning: An Introduction. *IEEE Transactions on Neural Networks*. 1998 Sep 1;9(5):1054. Available from: <https://doi.org/10.1109/tnn.1998.712192>
- [22] Schulman J, Wolski F, Dhariwal P, Radford A, Klimov O. Proximal policy optimization algorithms. *arXiv preprint arXiv:1707.06347*. 2017 Jul 20. Available from: <https://doi.org/10.48550/arXiv.1707.06347>
- [23] Zhang K, Yang Z, Başar T. Multi-Agent Reinforcement Learning: A Selective Overview of Theories and Algorithms. *Handbook of Reinforcement Learning and Control*. 2021 Jun 24:321–84. Available from: https://link.springer.com/chapter/10.1007/978-3-030-60990-0_12
- [24] Boyd S, Vandenberghe L. Convex optimization. *Cambridge University Press*; 2004 Mar 8. Available from: <https://stanford.edu/~boyd/cvxbook/>
- [25] Bertsekas D. Dynamic Programming and Optimal Control: Volume I. *Athena Scientific*; 2012. Available from: https://web.mit.edu/dimitrib/www/DP1_Short_View.pdf
- [26] Goldsmith A. Wireless communications. *Cambridge University Press*; 2005 Aug 8. Available from: <https://doi.org/10.1017/CB09780511841224>
- [27] Tse D, Viswanath P. Fundamentals of Wireless Communication. *Cambridge University Press*; 2005 May 26. Available from: <http>

- [s://web.stanford.edu/~dntse/papers/press_book.pdf](https://web.stanford.edu/~dntse/papers/press_book.pdf)
- [28] Liu G, Deng J, Zhu Y, Li N, Han B, Wang S, Rui H, Wang J, Zhang J, Cui Y, Cui Y. 6G autonomous radio access network empowered by artificial intelligence and network digital twin. *Frontiers of Information Technology & Electronic Engineering*. 2025 Feb;26(2):161–213. Available from: <https://doi.org/10.1631/FITEE.2400569>
 - [29] Lu Y, Maharjan S, Zhang Y. Adaptive Edge Association for Wireless Digital Twin Networks in 6G. *IEEE Internet of Things Journal*. 2021 Jul 20;8(22):16219–30. Available from: <https://doi.org/10.1109/JIOT.2021.3098508>
 - [30] Goodfellow IJ, Shlens J, Szegedy C. Explaining and Harnessing Adversarial Examples. *arXiv preprint arXiv:1412.6572*. 2014 Dec 20. Available from: <https://doi.org/10.48550/arXiv.1412.6572>
 - [31] McMahan HB, Moore E, Ramage D, Hampson S, Arcas BAY. Communication-Efficient Learning of Deep Networks from Decentralized Data. *arXiv (Cornell University)*. 2016 Feb 17; Available from: <http://arxiv.org/abs/1602.05629>
 - [32] Ziegler V, Schneider P, Viswanathan H, Montag M, Kanugovi S, Rezaki A. Security and Trust in the 6G Era. *Ieee Access*. 2021 Oct 14;9:142314–142327. Available from: <https://doi.org/10.1109/ACCESS.2021.3120143>
 - [33] Evgenidis NG, Mitsiou NA, Tegos SA, Diamantoulakis PD, Sari-giannidis P, Krikidis I, Karagiannidis GK. Hybrid Semantic-Shannon Communications. *IEEE Transactions on Wireless Communications*. 2024 Mar 20;23(9):10926–40. Available from: <https://doi.org/10.1109/TWC.2024.3376998>
 - [34] Popovski P, Nielsen JJ, Stefanovic C, De Carvalho E, Strom E, Trillingsgaard KF, Bana AS, Kim DM, Kotaba R, Park J, Sorensen RB. Wireless Access for Ultra-Reliable Low-Latency Communication: Principles and Building Blocks. *IEEE Network*. 2018 Apr 2;32(2):16–23. Available from: <https://doi.org/10.1109/MNET.2018.1700258>
 - [35] Wang CX, You X, Gao X, Zhu X, Li Z, Zhang C, Wang H, Huang Y, Chen Y, Haas H, Thompson JS. On the Road to 6G: Visions, Requirements, Key Technologies, and Testbeds. *IEEE Communications Surveys & Tutorials*. 2023 Feb 27;25(2):905–74. Available from: <https://doi.org/10.1109/COMST.2023.3249835>
 - [36] Alhammadi A, Shayeia I, El-Saleh AA, Azmi MH, Ismail ZH, Kouhalvandi L, Saad SA. Artificial Intelligence in 6G Wireless Networks: Opportunities, Applications, and Challenges. *International Journal of Intelligent Systems*. 2024;2024(1):8845070. Available from: <https://doi.org/10.1155/2024/8845070>
 - [37] Ye H, Liang L, Li GY, Juang BH. Deep Learning-Based End-to-End Wireless Communication Systems With Conditional GANs as Unknown Channels. *IEEE Transactions on Wireless Communications*. 2020 Feb 6;19(5):3133–43. Available from: <https://doi.org/10.1109/TWC.2020.2970707>
 - [38] Popovski P, Stefanović Č, Nielsen JJ, De Carvalho E, Angelichinoski M, Trillingsgaard KF, Bana AS. Wireless Access in Ultra-Reliable Low-Latency Communication (URLLC). *IEEE Transactions on Communications*. 2019 May 3;67(8):5783–801. Available from: <https://doi.org/10.1109/TCOMM.2019.2914652>
 - [39] Wang CX, Di Renzo M, Stanczak S, Wang S, Larsson EG. Artificial Intelligence Enabled Wireless Networking for 5G and Beyond: Recent Advances and Future Challenges. *IEEE Wireless Communications*. 2020 Mar 4;27(1):16–23. Available from: <https://doi.org/10.1109/MWC.001.1900292>
 - [40] Chen W, Lin X, Lee J, Toskala A, Sun S, Chiasserini CF, Liu L. 5G-Advanced Toward 6G: Past, Present, and Future. *IEEE Journal on Selected Areas in Communications*. 2023 Jun 20;41(6):1592–619. Available from: <https://doi.org/10.1109/JSAC.2023.3274037>
 - [41] Kazmi SA, Khan LU, Tran NH, Hong CS. Network Slicing for 5G and Beyond Networks. *Berlin: Springer*; 2019 May 14. Available from: <https://link.springer.com/book/10.1007/978-3-030-16170-5>
 - [42] Shi W, Cao J, Zhang Q, Li Y, Xu L. Edge Computing: Vision and Challenges. *IEEE Internet of Things Journal*. 2016 Jun 9;3(5):637–46. Available from: <https://doi.org/10.1109/JIOT.2016.2579198>
 - [43] Mao Y, You C, Zhang J, Huang K, Letaief KB. A Survey on Mobile Edge Computing: The Communication Perspective. *IEEE Communications Surveys & Tutorials*. 2017 Aug 25;19(4):2322–58. Available from: <https://doi.org/10.1109/COMST.2017.2745201>
 - [44] Kamel M, Hamouda W, Youssef A. Ultra-Dense Networks: A Survey. *IEEE Communications Surveys & Tutorials*. 2016 May 23;18(4):2522–45. Available from: <https://doi.org/10.1109/COMST.2016.2571730>
 - [45] Pan G, Gao Y, Gao Y, Yu W, Zhong Z, Yang X, Guo X, Xu S. AI-Driven Wireless Positioning: Fundamentals, Standards, State-of-the-Art, and Challenges. *IEEE Communications Surveys & Tutorials*. 2025 Dec 25. Available from: <https://doi.org/10.1109/COMST.2025.3648577>
 - [46] Dai L, Jiao R, Adachi F, Poor HV, Hanzo L. Deep learning for wireless communications: An emerging interdisciplinary paradigm. *IEEE Wireless Communications*. 2020 Aug 12;27(4):133–9. Available from: <https://doi.org/10.1109/MWC.001.1900491>
 - [47] Qamar F, Siddiqui MU, Hindia MN, Hassan R, Nguyen QN. Issues, challenges, and research trends in spectrum management: A comprehensive overview and new vision for designing 6G networks. *Electronics*. 2020 Sep 1;9(9):1416. Available from: <https://www.mdpi.com/2079-9292/9/9/1416>
 - [48] Chowdhury MZ, Shahjalal M, Ahmed S, Jang YM. 6G Wireless Communication Systems: Applications, Requirements, Technologies, Challenges, and Research Directions. *IEEE Open Journal of the Communications Society*. 2020 Jul 20;1:957–75. Available from: <https://doi.org/10.1109/OJCOMS.2020.3010270>
 - [49] Dang S, Amin O, Shihada B, Alouini MS. What should 6G be?. *Nature Electronics*. 2020 Jan;3(1):20–9. Available from: <https://www.nature.com/articles/s41928-019-0355-6>
 - [50] Letaief KB, Chen W, Shi Y, Zhang J, Zhang YJ. The Roadmap to 6G: AI Empowered Wireless Networks. *IEEE communications magazine*. 2019 Aug 21;57(8):84–90. Available from: <https://doi.org/10.1109/MCOM.2019.1900271>
 - [51] Dintakurthy Y, Innmuri RK, Vanteru A, Thotakuri A. Emerging Applications of Artificial Intelligence in Edge Computing: A Comprehensive Review. *Journal of Modern Technology*. 2024;175–85. Available from: <https://doi.org/10.71426/jmt.v1.i2.pp175-185>
 - [52] Pothireddy SR. Cloud-Native AI-Driven Enterprise Automation for Scalable Digital Process Transformation in Multi-Industry Ecosystems. *Journal of Applied Sciences and Modelling*. 2025 Dec 31;60–74. Available from: <https://doi.org/10.71426/jas.m.v1.i1.pp60-74>
 - [53] Alzubi JA, Dhandapani MG, Aiyappan A, Damodaran S, Shreyas J, Priyanka TP. Adaptive Residual Recurrent Neural Network with Heuristic Optimization for Spectral Energy Balancing in 6G Massive MIMO Systems. *International Journal of Computational Intelligence Systems*. 2025 Dec 28. Available from: <https://doi.org/10.1007/s44196-025-01106-w>
 - [54] Geagea C, Tlais AA, Abou Chakra S, Kurt GK. An Electrical Model for Software Defined Radio Sub-THz Systems. In *2026 6th Middle East and North Africa Communications Conference (MENACOMM) 2026* May 12 (pp. 1–7). IEEE. Available from: <https://doi.org/10.1109/MENACOMM69507.2026.11532915>
 - [55] Natarajan Y, Srihari K, Dhiman G, Chandragandhi S, Gheisari M, Liu Y, Lee CC, Singh KK, Yadav K, Alharbi HF. An IoT and machine learning-based routing protocol for reconfigurable engineering application. *IET Communications*. 2022 Mar;16(5):464–75. Available from: <https://doi.org/10.1049/cmu2.12266>
 - [56] Gheisari M, Wang G, Chen S, Seyfollahi A. A Method for Privacy-Preserving in IoT-SDN Integration Environment. In *2018 IEEE Intl Conf on Parallel & Distributed Processing with Applications, Ubiquitous Computing & Communications, Big Data & Cloud Computing, Social Computing & Networking, Sustainable Computing & Communications (ISPA/IUCC/BDCloud/SocialCom/SustainCom)* 2018 Dec 11

(pp. 895-902). IEEE. Available from: <https://doi.org/10.1109/BDCloud.2018.00132>