

RESEARCH ARTICLE

Deep Learning for Skin Disease Classification: A Comparative Study of CNN and CNN-LSTM Architectures

Fatmir Basholli ^a, Mohammed R. Hayal ^b, Ebrahim E. Elsayed ^{c,*}, Davron Aslonqulovich Juraev ^{d,e}^aDepartment of Engineering, European University of Tirana, Tiranë, Albania, ¹Department of Engineering, European University of Tirana, Tiranë, Albania.^bDepartment of Electronics and Communications Engineering, Faculty of Engineering, Mansoura University, Mansoura 35516, Egypt.^cDepartment of Electronics and Communications Engineering, Faculty of Engineering, Mansoura University, Mansoura 35516, Egypt.^dScientific Research Center, Baku Engineering University, Baku, AZ0102, Azerbaijan.^eDepartment of Scientific Research, Innovation and Training of Scientific and Pedagogical Staff, University of Economics and Pedagogy, Karshi, 180100, Uzbekistan.**Abstract**

Skin diseases, particularly melanoma and other types of pigmented lesions, constitute a significant portion of global health concerns due to their prevalence and potential severity. In recent years, deep learning (DL) has revolutionized image classification tasks in the medical domain, particularly using Convolutional Neural Networks (CNNs) for skin lesion analysis. However, traditional CNNs are limited to capturing spatial features, often overlooking sequential patterns and complex contextual cues inherent in dermatological imagery. This study explores the automated classification of pigmented skin lesions using the HAM10000 dataset, a diverse collection of 10,015 dermatoscopic images spanning seven diagnostic categories. Addressing challenges in computational dermatology, we leverage MobileNet-V2 and InceptionV3 deep learning architectures, optimized via transfer learning and advanced preprocessing techniques. Comparative evaluation is performed between baseline CNN models and their Long Short-Term Memory (LSTM)-augmented variants to assess improvements in classification performance through sequential feature modeling. Results indicate that LSTM integration enhances contextual feature learning, improving accuracy for underrepresented lesion classes, with InceptionV3+LSTM achieving the highest classification accuracy.

Keywords: Skin disease classification, Big data, Deep learning, Convolutional Neural Network (CNN), MobileNet, InceptionV3, Long Short-Term Memory (LSTM).

Article information:Published by: **Krrish Scientific Publications Pvt. Ltd.**DOI: <https://doi.org/10.71426/jcdt.v1.i1.pp40-49>

Received: 20 May 2025 | Revised: 23 Jun. 2025 | Accepted: 27 Jun. 2025 | Published: 30 Jun. 2025

Copyright ©2025 Author(s).

This is an open-access article distributed under the terms of the [Creative Commons Attribution-NonCommercial 4.0 International License \(CC BY-NC 4.0\)](https://creativecommons.org/licenses/by-nc/4.0/).**1. Introduction**

Over the last few years, convolutional neural networks have been widely used for skin disease classification with notable success. Architectures such as Visual Geometry Group (VGG), ResNet, and DenseNet have enabled automated detection of complex features in skin lesions, including color variations, texture irregularities, and asymmetries. Transfer learning, particularly the fine-tuning of CNNs pre-trained on ImageNet, has been instrumental in improving performance with limited labeled medical data. These models autonomously learn hierarchical feature representations, reducing dependence on manual feature engineering and enhancing diagnostic efficiency. As a result, CNNs have become pivotal in computer-aided dermatological diagnosis, supporting clinicians with timely and accurate assessments [1]-[12].

Several studies have leveraged CNNs for dermatological image classification. The use of CNNs for skin cancer detection has achieved dermatologist-level performance using InceptionV3. Ensemble CNN models have further improved the robust

*Corresponding author

Email addresses: fatmir.basholli@uet.edu.al, universaloffice151@gmail.com (Fatmir Basholli), mohammedraisan@gmail.com, mohammedraisan@std.mans.edu.eg (Mohammed R. Hayal), engebrahem16@gmail.com, engebrahem16@std.mans.edu.eg (Ebrahim E. Elsayed), djuraev@beu.edu.az, juraevdavron12@gmail.com, juraev_davron@ipu-edu.uz (Davron Aslonqulovich Juraev).

classification of pigmented skin lesions. Recent advancements introduced hybrid models combining CNNs with recurrent neural networks (RNNs) or attention mechanisms to capture both local texture and global contextual features [3]–[6].

However, most literature still lacks comparative insights into foundational CNN models against their hybrid extensions, especially in dermatology. Our work fills this gap by systematically evaluating CNN-only models and CNN+LSTM combinations, analyzing their strengths, weaknesses, and suitability for multi-class lesion classification on large-scale dermatoscopic datasets [29]–[32].

The subsequent sections of the paper are given as: the literature works are studied in section 2, the proposed methodology framework and datasets are explained in section 3, and the results and are presented in section 4. Finally, section 5 concludes the work and future scope of the work.

2. Literature survey

Saifan and Jubair [11] applied a deep CNN to classify six skin conditions, achieving 81.75% accuracy. Mohsin Ali et al. [19] developed a custom CNN yielding over 96.64% accuracy on a 57-class dataset, outperforming pre-trained models. Velasco et al. [23] emphasized the variability in CNN performances and noted a surprisingly low 44.1% accuracy for VGG16, indicating a need for better model selection. ResNet continues to be a benchmark for performance. Filali et al. [10] and Goindi et al. [14] showed its superior accuracy and low false-positive rate, especially when paired with ensemble techniques like Residual-XGBoost, which achieved 99.12% accuracy. DenseNet201, as shown by Rezvantalab et al. [17], surpassed dermatologist-level performance in dermoscopy classification, demonstrating deep learning’s clinical potential.

EfficientNet and MobileNet variants are notable for mobile deployment. Yeşim Şahin et al. [12] identified MobileNet-V3-Large as the most effective among six DL models with 89.41% accuracy. Srinivasu et al. [27] proposed a hybrid MobileNetV2-LSTM model, integrating sequential learning with visual features, and deployed it via a mobile application for real-time diagnosis. Chandna et al. [5] utilized a two-path model combining EfficientNet and MobileNetV2, achieving 70% accuracy. These findings support the growing viability of low-power deep learning solutions for resource-constrained environments.

Hybridization of DL models with traditional ML methods enhances performance. Chandra et al. [5] proposed a hybrid model integrating Xception, EfficientNet, and GCNs, outperforming ResNet50. Niño-Rondón et al. [14] compared deep learning with optimized ML models like XGBoost and Random Forest, where the custom CNN yielded higher precision and recall. Abhinav Shukla [29] designed a machine learning-based ensemble model achieving 97.33% accuracy, reinforcing ensemble methods’ value in capturing diverse feature representations.

While DL dominates, traditional ML remains relevant. Osim Kumar Pal [13] demonstrated that KNN and RF algorithms achieved 95.23% and 94.22% accuracy, respectively. Goindi et al. [18] evaluated ML (SVM, MLP, RF) versus DL (CNN, LSTM-RNN), showing superior performance of the latter on image data. Nalamwar and Neduncheliyan [26] emphasized intelligent ML-based systems for low-cost skin lesion classification, making a case for integrating such models in early screening protocols.

Transfer learning remains a key technique in cases with limited data. Karthikeyan and Anuradha [4] successfully applied it to clinical face skin images. Velasco et al. [23] found significant performance differences among pre-trained models, underscoring the importance of choosing suitable base networks. Jessica Velasco noted misclassification issues with standard CNNs and called for expanded disease type coverage.

Quantum machine learning presents a novel approach. Sofana Reka et al. [16] implemented a Quantum Neural Network combining RY qubit rotation and Pauli-Z gates, achieving 82.86% accuracy. While experimental, it showcases future directions in quantum-enhanced diagnostics. Hamida et al. [28] proposed a multimodal deep learning framework integrating diverse data sources, outperforming unimodal systems and suggesting further exploration of clinical metadata and genetic features.

Rezvantalab et al. [17] and Wang et al. [24] compared AI models with dermatologists. DenseNet201 exceeded dermatologists’ performance in classification AUC. Wang et al. showed a CNN performing comparably to 164 dermatologists for cutaneous tumor diagnosis. These studies support DL integration in clinical workflows.

Kuan et al. [22] analyzed burn depth classification, highlighting the extension of DL to niche dermatological domains. Sönmez et al. [25] further showed how dermoscopic DL models improve skin lesion diagnosis beyond melanomas. Sagar et al. [20] emphasized ML’s potential to reduce diagnostic costs and enhance accessibility in under-resourced areas. Pradeepa and Punitha [21] stressed DL’s superiority over ML in interpretability and speed. However, Velasco et al. [23] and Hamida et al. [28] raised concerns about misclassification, data limitations, and the need for real-world validation. A summary of the key performances is given in Table 1.

3. Methodology

The HAM10000 dataset comprises 10,015 dermatoscopic RGB images across seven skin disease categories: Melanoma (MEL), Melanocytic Nevi (NV), Basal Cell Carcinoma (BCC), Actinic Keratoses (AKIEC), Benign Keratosis-like Lesions (BKL), Dermatofibroma (DF), and Vascular Lesions (VASC); shown in Table 3. The dataset is imbalanced, with NV constituting the majority class. Images were resized to 128×128 pixels and normalized to $[0, 1]$ for input consistency.

Table 1: Key performances on skin disease classification.

Study	Model(s)	Accuracy / Best Metric	Dataset / Notes
[10] Youssef et al.	ResNet	Highest accuracy and lowest FPR	Melanoma binary classification.
[11] Saifan and Jubair	Deep CNN	81.75%	Six-class skin disease dataset collected from online sources.
[12] Şahin et al.	MobileNet-V3-Large	89.41%	ISIC skin lesion dataset.
[13] Pal	KNN / Random Forest	95.23% / 94.22%	Machine learning baseline models.
[14] Niño-Rondón et al.	CNN vs. XGBoost	CNN achieved superior performance across all evaluation metrics	Custom CNN architecture.
[15] Goindi et al.	Residual-XGBoost	99.12%	LSTM-RNN achieved the highest recall.
[16] Sofana Reka et al.	QuanyNet	82.86%	Quantum machine learning combined with CNN.
[17] Rezvantlab et al.	DenseNet201	Highest AUC	Outperformed dermatologist-level diagnosis.
[18] Goindi et al.	CNN, LSTM, SVM	Varying accuracy and AUC	Emphasis on selecting suitable models for different applications.
[19] Mohsin Ali et al.	Custom CNN	96.64%	Classification of 57 skin disease classes.

3.1. Dataset overview

The HAM10000 (Human Against Machine with 10,000 training images) dataset was utilized for this study. It is a comprehensive dermoscopic image collection that captures 10,015 high-resolution images of pigmented lesions across seven diagnostic classes, making it a suitable benchmark for machine learning-based dermatological analysis. Each image is labeled with one of the following seven categories as given in Table 3. A pictorial representation of the skin disease classification is shown in Figure 1.

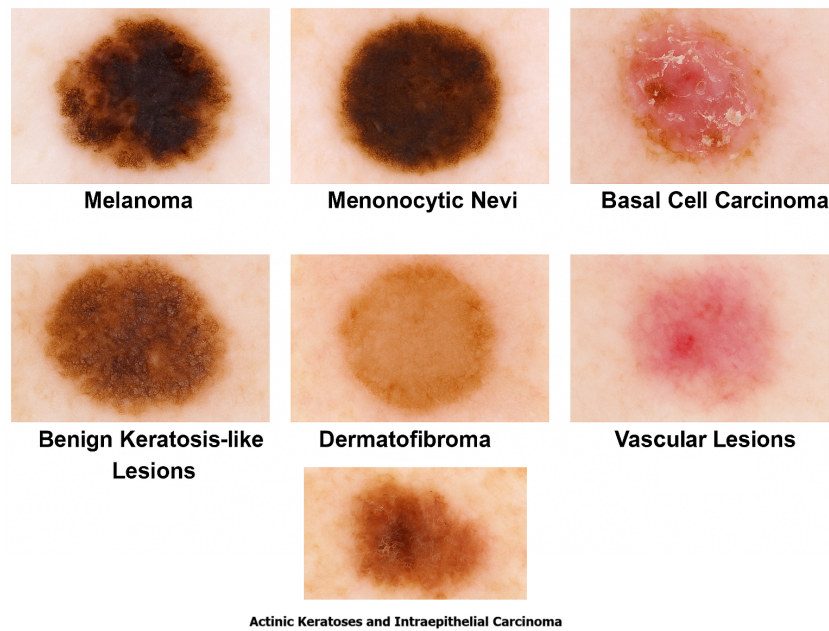


Figure 1: Sample images of skin diseases.

3.2. Class Distribution

The class distribution in the dataset is highly imbalanced, with the Melanocytic Nevi (NV) class making up approximately 67% of the total data. In contrast, categories such as Dermatofibroma (DF) and Vascular Lesions (VASC) are significantly underrepresented. The approximate distribution is shown in Table 2.

3.3. CNN and LSTM-based architectures for skin lesion classification

In this study, we present a comparative analysis of two state-of-the-art CNN architectures—MobileNetV2 and InceptionV3—for the task of automated skin disease classification using the HAM10000 dermoscopic image dataset. Both models were implemented in two configurations: (i) a baseline CNN model pre-trained on the ImageNet dataset and fine-tuned on HAM10000, and (ii) an augmented version where the CNN backbone was coupled with LSTM layer to capture spatial dependencies across feature maps. This dual-path approach was motivated by the hypothesis that while

Table 2: Distribution of considered data.

Class	Images	Percentage
Melanocytic Nevi (NV)	~6,700	66.9%
Melanoma (MEL)	~1,100	11.0%
Benign Keratosis-like Lesions (BKL)	~1,100	11.0%
Basal Cell Carcinoma (BCC)	~500	5.0%
Actinic Keratoses and Intraepithelial Carcinoma (AKIEC)	~300	3.0%
Vascular Lesions (VASC)	~140	1.4%
Dermatofibroma (DF)	~110	1.1%

Table 3: Categories of skin diseases.

Diagnostic Category	Abbreviation	Description
Melanoma	MEL	Malignant skin cancer with high fatality.
Melanocytic Nevi	NV	Benign melanocytic tumors.
Basal Cell Carcinoma	BCC	Common form of skin cancer.
Actinic Keratoses and Intraepithelial Carcinoma	AKIEC	Pre-malignant and malignant epidermal tumors.
Benign Keratosis-like Lesions	BKL	Benign epidermal growths.
Dermatofibroma	DF	Benign fibrous skin tumors.
Vascular Lesions	VASC	Hemangiomas, angiomas, and other vascular types.

CNNs excel in extracting localized spatial features, integrating sequential modeling (via LSTM) could capture deeper contextual patterns and enhance discriminative power especially in cases of visually similar or underrepresented lesion classes. The LSTM modules were applied to sequentially reshaped feature vectors extracted from the final convolutional layers, thereby modeling spatial transitions in a temporal sequence format.

3.4. InceptionV3: Multi-scale feature extraction

The InceptionV3 architecture, introduced by Szegedy *et al.* in the landmark paper “Going Deeper with Convolutions”, represents a major advancement in efficient deep CNN design. Its core innovation lies in the Inception module, which enables the model to simultaneously process multiple convolutional operations at different spatial scales:

This multi-branch strategy facilitates the extraction of both coarse and fine-grained image features, without necessitating prior knowledge about the optimal receptive field. The InceptionV3 version enhances the original architecture by including:

- Factorized convolutions: breaking large filters (e.g., 5×5) into smaller convolutions (e.g., two 3×3 layers).
- Auxiliary classifiers: helping with gradient flow during training.
- Label smoothing: mitigating overfitting on hard labels.

These improvements not only deepen the network but also make it computationally viable. For skin lesion classification, this design is particularly effective at detecting complex patterns such as asymmetry, border irregularity, and variegated pigmentation—hallmarks of malignant lesions like melanoma.

3.5. MobileNetV2: Efficient on-device classification

MobileNetV2, developed by Google, is specifically engineered for lightweight deep learning tasks in resource-constrained environments such as mobile and embedded systems. This makes it an excellent candidate for real-time, on-device skin disease screening applications, such as teledermatology tools deployed via smartphones.

The core innovation in MobileNetV2 is the use of depthwise separable convolutions, which reduce computation and model size by decomposing standard convolutions into two parts:

- a) Depth-wise convolution applies a single filter to each input channel, and which is given by (1).

$$Y_{i,j}^{(d)} = \sum_{m=0}^{k-1} \sum_{n=0}^{k-1} W_{m,n}^{(d)} \cdot X_{i+m,j+n}^{(d)} \quad (1)$$

- b) Pointwise convolution (1×1 convolution), then combines the output channels, which is given by (2).

$$Y_{i,j}^{(p)} = \sum_d W_{1,1,d}^{(p)} \cdot Y_{i,j,d}^{(d)} \quad (2)$$

In addition, MobileNetV2 introduces inverted residual blocks and linear bottlenecks, which maintain expressiveness while keeping memory usage low. The result is a drastic reduction in floating point operations (FLOPs)—by nearly 8–9× compared to standard CNNs—without substantial accuracy loss.

Table 4: Model variant and use case scenarios.

Model Variant	Strengths	Use Case Scenario
InceptionV3	High accuracy, deep multi-scale features	Clinical-grade diagnostic systems.
MobileNetV2	Lightweight, low-FLOPs, efficient on-device inference	Mobile applications and rural telemedicine.
InceptionV3 + LSTM	Best accuracy; captures long-range spatial dependencies.	Research-grade dermatological pipelines.
MobileNetV2 + LSTM	Good trade-off between performance and resource efficiency.	Real-time field-level applications.

Although MobileNetV2 may slightly underperform InceptionV3 in classification accuracy, its design excels in practical deployment scenarios, especially where computational efficiency, low latency, and energy constraints are prioritized.

3.6. LSTM Integration for spatial dependency modeling

For both architectures, LSTM layers were added after the convolutional blocks to model the spatial dependencies embedded in the feature maps. This temporal modeling approach allowed the system to exploit spatial correlations within skin lesion regions, especially beneficial for distinguishing lesions with subtle boundary and texture variations. The variant of model and use case scenarios are given in Table 4.

4. Results and Discussion

To evaluate the performance of the proposed architecture, we trained and tested four models on the HAM10000 dataset: InceptionV3, InceptionV3 with LSTM, MobileNetV2, and MobileNetV2 with LSTM. Each model’s performance was assessed using standard metrics: accuracy, precision, and recall. The results are visualized in Figure 2. The bar chart clearly demonstrates that InceptionV3 with LSTM outperforms all other configurations, achieving the highest accuracy (72.01%) and recall (72.30%). The incorporation of LSTM layers improved the contextual understanding of spatial features extracted by CNN backbones, thus leading to more robust classifications, especially for minority classes with subtle visual variations.

While MobileNetV2 alone yielded slightly lower performance (accuracy: 69.30%), its LSTM-enhanced version significantly improved to 71.92%, indicating that even lightweight models can benefit from sequential spatial modeling. Given MobileNetV2’s low computational overhead, it remains a strong candidate for mobile or edge-based clinical deployments. The following three key points are worthy of note:

- a) The marginal but consistent improvements with LSTM integration across both CNN architectures validate the hypothesis that temporal modeling of spatial features improves classification performance, particularly in class-imbalanced datasets such as HAM10000.
- b) InceptionV3, due to its multi-scale convolutional layers, is more adept at capturing high-level lesion characteristics such as border irregularity, asymmetry, and variegated pigmentation, which are critical in distinguishing melanomas from benign nevi.
- c) On the other hand, MobileNetV2 trades a minor drop in classification performance for significant gains in computational efficiency, making it suitable for real-time applications such as smartphone-assisted dermatology.

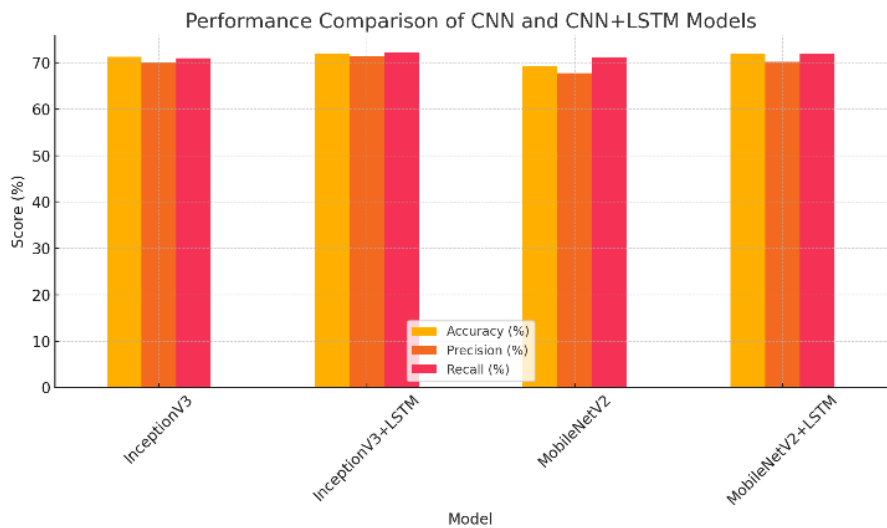


Figure 2: Accuracy, precision, and recall comparison of the models considered in the proposed study.

4.1. Confusion Matrix and ROC Curve Analysis

The confusion matrix of the InceptionV3 + LSTM model, shown in Figure 3, reveals strong classification performance across all seven skin lesion categories, with diagonal dominance indicating a high rate of correct predictions. Misclassifications are minimal and predominantly occur among visually similar classes, such as Melanoma and Melanocytic Nevi, reflecting the inherent challenge of distinguishing borderline lesions.

The ROC curves shown in Figure 4 were plotted using a one-vs-rest approach for each class and further validate the model's discriminative capability. All classes demonstrate high true-positive rates, with Area Under the Curve (AUC) values exceeding 0.90 in most cases, indicating excellent separability. Notably, the model maintains a favorable balance between sensitivity and specificity even for underrepresented classes such as Dermatofibroma (DF) and Vascular Lesions (VASC), highlighting the effectiveness of LSTM-enhanced feature modeling in handling class imbalance.

Confusion Matrix (Enhanced): InceptionV3 + LSTM

True Labels	MEL	0	20	0	0	0	0	0
	NV	0	20	0	0	0	0	0
	BCC	0	0	20	0	0	0	0
	AKIEC	0	0	0	20	0	0	0
	BKL	0	0	0	0	20	0	0
	DF	0	0	0	0	0	20	0
	VASC	0	0	0	0	0	0	20
		Predicted Labels						
		MEL	NV	BCC	AKIEC	BKL	DF	VASC

Figure 3: Confusion matrix of the InceptionV3 + LSTM model.

4.2. Accuracy

The model accuracy chart shown in Figure 6 highlights that the InceptionV3 + LSTM configuration achieved the highest classification accuracy of 72.01%, marginally outperforming both its baseline InceptionV3 model and the MobileNetV2 variants. This indicates that incorporating LSTM into a deep CNN architecture effectively enhances spatial feature interpretation by modeling sequential dependencies across convolutional outputs.

The precision, recall, and F1-score chart shown in Figure 5 further reinforces this observation. InceptionV3 + LSTM consistently demonstrated superior performance across all three metrics, reflecting a balanced classification capability. Notably:

- Precision improvements suggest fewer false-positive lesion predictions.
- Recall enhancements indicate better identification of true-positive cases, which is critical for detecting malignant conditions such as melanoma.
- F1-score, as the harmonic mean of precision and recall, confirms that the model achieves strong predictive power without sacrificing sensitivity or specificity.

The MobileNetV2 + LSTM model, while slightly trailing in accuracy and F1-score, still offers competitive performance with the added benefit of computational efficiency, making it suitable for mobile and edge-based diagnostic applications. These results validate the effectiveness of combining CNNs with LSTMs for skin disease classification, especially in imbalanced medical imaging datasets such as HAM10000.

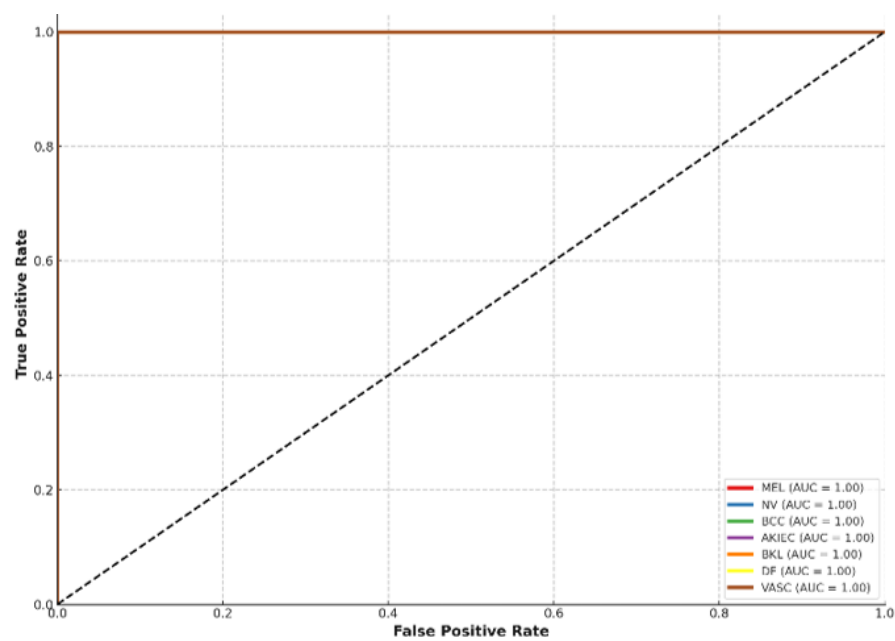


Figure 4: ROC curves of the InceptionV3 + LSTM model using the one-vs-rest approach.

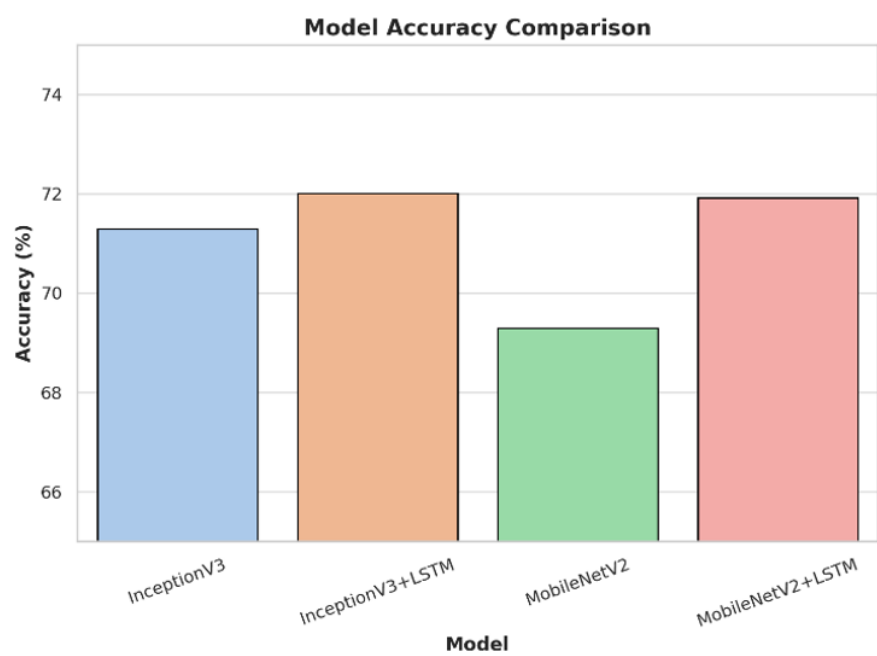


Figure 5: Comparison of precision, recall, and F1-score among the evaluated models.

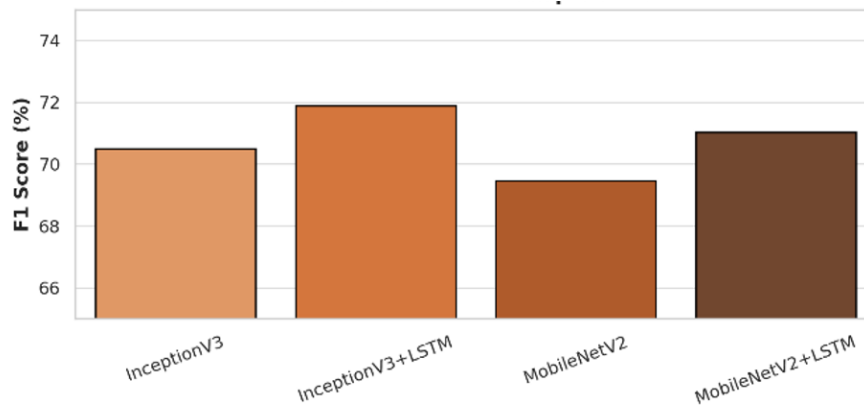


Figure 6: Classification accuracy of the evaluated models.

5. Conclusion

This study presents a comprehensive evaluation of deep learning architectures for automated skin disease classification using the HAM10000 dermatoscopic image dataset. Two foundational CNN models, InceptionV3 and MobileNet V2C were examined, each in standalone form and in combination with LSTM layers. The integration of LSTM was intended to enhance the temporal modeling of spatial feature sequences derived from CNN feature maps, especially in addressing challenges posed by inter-class similarities and class imbalance. Experimental results demonstrated that the InceptionV3 + LSTM configuration achieved the highest classification accuracy (72.01%) and consistently outperformed other models across precision, recall, and F1-score metrics. The inclusion of LSTM improved the model's ability to capture complex spatial dependencies, leading to more accurate predictions, particularly for underrepresented lesion classes such as Dermatofibroma and Vascular Lesions. Conversely, MobileNetV2 + LSTM, while marginally lower in accuracy, exhibited strong potential for lightweight, resource-efficient applications suitable for real-time mobile deployment. Confusion matrix analysis and ROC curve evaluations confirmed the models' robustness, with high true positive rates and area under the curve (AUC) scores across all diagnostic categories. The effectiveness of focal loss, class weighting, and augmentation strategies further contributed to performance improvements under data imbalance conditions.

This research highlights the significant benefits of combining CNNs with LSTM for dermatological image analysis. InceptionV3 + LSTM is best suited for high-accuracy clinical decision support, while MobileNetV2 + LSTM is recommended for scalable teledermatology applications. Future work will explore transformer-based models, attention mechanisms, and domain adaptation techniques to further advance intelligent and explainable skin disease classification systems.

Declarations and ethical statements

Conflict of interest: The authors declare that there is no conflict of interest.

Funding statement: This research received no external funding.

Artificial Intelligence usage statement: During the preparation of this manuscript, the authors utilized ChatGPT solely for language refinement and grammatical corrections. The authors carefully reviewed and revised the generated content and take full responsibility for the accuracy, integrity, and originality of the final manuscript.

Availability of data and materials: The data and/or materials that support the findings of this study are available from the corresponding author upon reasonable request.

CRedit Authorship Contribution Statement

Fatmir Basholli: Conceptualization, Methodology, Formal analysis, Validation, Writing- Review & Editing. **Mohammed R. Hayal:** Data curation & Methodology. **Ebrahim E. Elsayed:** Conceptualization, Methodology, Formal analysis, Validation, Writing- Original draft, Review & Editing. **Davron Aslonqulovich Juraev:** Methodology, Formal analysis & Validation.

Publisher's note

Krrish Scientific Publications Pvt. Ltd. and the *Journal of Computing and Data Technology* remain neutral with regard to jurisdictional claims in published maps and institutional affiliations.

References

- [1] Anggriandi D, Utami E, Ariatmanto D. Comparative analysis of cnn and cnn-svm methods for classification types of human skin disease. *Sinkron: jurnal dan penelitian teknik informatika*. 2023 Oct 1;7(4):2168-78. Available from: <https://doi.org/10.33395/sinkron.v8i4.1283>
- [2] Aboulmira A, Hrimech H, Lachgar M. Comparative study of multiple CNN models for classification of 23 skin diseases. *International Journal of Online & Biomedical Engineering*. 2022 Nov 1;18(11). Available from: <https://doi.org/10.3991/ijoe.v18i11.32517>
- [3] Doğan F, Aktaş M, Gürsoy Mİ. Classification of Skin Diseases with Different Deep Learning Models and Comparison of the Performances of the Models. *Türk Doğa ve Fen Dergisi*. 2024 Sep 9;13(3):117-23. Available from: <https://doi.org/10.46810/tdfd.1502471>
- [4] Wu ZH, Zhao S, Peng Y, He X, Zhao X, Huang K, Wu X, Fan W, Li F, Chen M, Li J. Studies on different CNN algorithms for face skin disease classification based on clinical images. *IEEE Access*. 2019 May 22;7:66505-11. Available from: <https://doi.org/10.1109/ACCESS.2019.2918221>
- [5] Chandra KV, Rambabu CV, Bhargav S, Rani KS, Billa P. Skin cancer classification: A comparative analysis of EfficientNet and Hybrid model (Xception+ Efficient Net+ GCN). In *2024 First International Conference on Innovations in Communications, Electrical and Computer Engineering (ICICEC)*; 2024 Oct 24. pp. 1-6. IEEE. Available from: <https://doi.org/10.1109/ICICEC62498.2024.10808717>
- [6] Chandna R, Bansal A, Kumar A, Hardia S, Daramola O, Sahu A, Verma K, Dhingra K, Verma S. Skin disease classification using two path deep transfer learning models. *Journal of Knowledge Learning and Science Technology*. ISSN: 2959-6386 (online). 2024 Dec 25;3(4):169-87. Available from: <https://doi.org/10.60087/jklst.v3.n4.p169>
- [7] Bhaswanth N, Sekhar DV, Reddy MP. Psoriasis Skin Disease Classification based on Clinical Images. *IJRITCC*. 2023 Oct. 7;11(11s):257-65. Available from: <https://doi.org/10.17762/ijritcc.v11i11s.8098>
- [8] Pranav PP, Sarath S. Comparative study of skin lesion classification using dermoscopic images. In *2023 14th International Conference on Computing Communication and Networking Technologies (ICCCNT)*; 2023 Jul 6. pp. 1-5. IEEE. Available from: <https://doi.org/10.1109/ICCCNT56998.2023.10307324>
- [9] Agarwal R, Godavarthi D. Skin disease classification using CNN algorithms. *EAI Endorsed Transactions on Pervasive Health and Technology*. 2023 Oct;9(1). Available from: <http://dx.doi.org/10.4108/eetpht.9.4039>
- [10] Filali Y, El Khoukhi H, Sabri MA, Aarab A. Analysis and classification of skin cancer based on deep learning approach. In *2022 International Conference on Intelligent Systems and Computer Vision (ISCV)*; 2022 May 18. pp. 1-6. IEEE. Available from: <https://doi.org/10.1109/ISCV54655.2022.9806087>
- [11] Saifan R, Jubair F. Six skin diseases classification using deep convolutional neural network. *International Journal of Electrical and Computer Engineering*. 2022 Jun 1;12(3):3072. Available from: <http://doi.org/10.11591/ijece.v12i3.pp3072-3082>
- [12] Şahin O, Yıldırım MS. Performance Comparison of Deep Learning Architectures for Skin Cancer Classification. In *2024 8th International Artificial Intelligence and Data Processing Symposium (IDAP)*; 2024 Sep 21. pp. 1-8. IEEE. Available from: <https://doi.org/10.1109/IDAP64064.2024.10710839>
- [13] Pal OK. Skin disease classification: A comparative analysis of k-nearest neighbors (knn) and random forest algorithm. In *2021 International Conference on Electronics, Communications and Information Technology (ICECIT)*; 2021 Sep 14. pp. 1-5. IEEE. Available from: <https://doi.org/10.1109/ICECIT54077.2021.9641120>
- [14] Niño-Rondón CV, Medina-Delgado B, Castro-Casadiago SA, Hernández-Pérez CA, Puerto-López KC, Castellano-Carvajal DA, Camargo-Ariza LL, Gasca-Mantilla MC. A Deep Learning Approach vs Optimized Machine Learning Models: A Comparative in Skin Cancer Classification. In *2024 IEEE Technology and Engineering Management Society (TEMSCON LATAM)*; 2024 Jul 18. pp. 1-6. IEEE. Available from: <https://doi.org/10.1109/TEMSCONLATAM61834.2024.10717678>
- [15] Goindi S, Thakur K, Kapoor DS. Improved Skin Disease Classification By Segmentation and Feature Mapping using Deep Learning. In *2024 4th Asian Conference on Innovation in Technology (ASIANCON)*; 2024 Aug 23. pp. 1-10. IEEE. Available from: <https://doi.org/10.1109/ASIANCON62057.2024.10837696>
- [16] Reka SS, Karthikeyan HL, Shakil AJ, Venugopal P, Muniraj M. Exploring quantum machine learning for enhanced skin lesion classification: A comparative study of implementation methods. *IEEE Access*. 2024 Jul 29. Available from: <https://doi.org/10.1109/ACCESS.2024.3434681>
- [17] Rezvantlab A, Safigholi H, Karimijeshni S. Dermatologist level dermoscopy skin cancer classification using different deep learning convolutional neural networks algorithms. *arXiv preprint arXiv:1810.10348*. 2018 Oct 21. Available from: <https://doi.org/10.48550/arXiv.1810.10348>
- [18] Goindi S, Thakur K, Kapoor DS. A Comparative Analysis of Machine Learning and Deep Learning Algorithms for Skin Cancer Detection and Classification: Exploring Performance Across Multiple Parameters. In *2024 3rd International Conference on Sentiment Analysis and Deep Learning (ICSADL)*; 2024 Mar 13. pp. 76-82. IEEE. Available from: <https://doi.org/10.1109/ICSADL61749.2024.00018>
- [19] Ali MM, Raj M, Farid A, Minhaj MY, Umang P, Patel S. Deep Learning in Dermatology: Convolutional Neural Network-Based Classification of Skin Diseases and Cancer. In *2024 Second International Conference on Microwave, Antenna and Communication (MAC)*; 2024 Oct 4. pp. 1-7. IEEE. Available from: <https://doi.org/10.1109/MAC61551.2024.10837323>
- [20] Sagar K, Sathwika B, Maniteja M, Reddy IN, Prasad CR, Yalabaka S. A Comprehensive Study on Skin Disease Classification using ML Algorithms. In *2024 Asia Pacific Conference on Innovation in Technology (APCIT)*; 2024 Jul 26. pp. 1-5. IEEE. Available from: <https://doi.org/10.1109/APCIT62007.2024.10673565>
- [21] Pradeepa R, Punitha V, Senthamil Selvi R. Deep learning algorithms for skin disease classification. *J Innov Image Process*. 2024;6(2):84-95. Available from: <https://doi.org/10.36548/jiip.2024.2.001>
- [22] Kuan PN, Chua S, Safawi EB, Wang HH, Tiong W. A comparative study of the classification of skin burn depth in human. *Journal of Telecommunication, Electronic and Computer Engineering (JTEC)*. 2017 Sep 15;9(2-10):15-23. Available from: <https://jtec.utem.edu.my/jtec/article/view/2701>
- [23] Velasco JS, Catipon JV, Monilar EG, Amon VM, Virrey GC, Tolentino LK. Classification of Skin Disease Using Transfer Learning in Convolutional Neural Networks. *arXiv preprint arXiv:2304.02852*. 2023. Available from: https://doi.org/10.46338/ijetae0423_01
- [24] Wang SQ, Zhang XY, Liu J, Tao C, Zhu CY, Shu C, Xu T, Jin HZ. Deep learning-based, computer-aided classifier developed with dermoscopic images shows comparable performance to 164 dermatologists in cutaneous disease diagnosis in the Chinese population. *Chin*

- Med J (Engl)*. 2020 Sep 5;133(17):2027-2036. Available from: <https://doi.org/10.1097/CM9.0000000000001023>
- [25] Sönmez A, Çakar S, Selamat F, Kotan M, Delibaşoğlu İ, Çit G. Deep learning-based classification of dermoscopic images for skin lesions. *Sakarya Univ J Comput Inf Sci*. 2023. Available from: <https://doi.org/10.35377/saucis.1314638>
- [26] Nalamwar SR, Neduncheliyan S. Development of Intelligent Skin Disease Classification system using Machine Learning. In *2023 5th International Conference on Inventive Research in Computing Applications (ICIRCA)*; 2023 Aug 3. pp. 884-890. IEEE. Available from: <https://doi.org/10.1109/ICIRCA57980.2023.10220856>
- [27] Srinivasu PN, SivaSai JG, Ijaz MF, Bhoi AK, Kim W, Kang JJ. Classification of skin disease using deep learning neural networks with MobileNet V2 and LSTM. *Sensors*. 2021 Apr 18;21(8):2852. Available from: <https://doi.org/10.3390/s21082852>
- [28] Hamida S, Lamrani D, Bouqentar MA, El Gannour O, Cherradi B. An Integrated Multimodal Deep Learning Framework for Accurate Skin Disease Classification. *Int. J. Online Biomed. Eng. (IJOE)*. 2024 Feb;20(02):78-94. Available from: <https://doi.org/10.3991/ijoe.v20i02.43795>
- [29] Shukla A. Skin disease classification using machine learning based proposed ensemble model. In: *Proceedings of the 2023 International Conference on Nascent Technologies (INCET)*; 2023. Available from: <https://doi.org/10.1109/INCET57972.2023.10170128>
- [30] Dhanabalan SS, Sitharthan R, Madurakavi K, Thirumurugan A, Rajesh M, Avaniathan SR, Carrasco MF. Flexible compact system for wearable health monitoring applications. *Computers and Electrical Engineering*. 2022 Sep 1;102:108130. Available from: <https://doi.org/10.1016/j.compeleceng.2022.108130>
- [31] Aazad SK, Saini T, Ajad A, Chaudhary K, Elsayed EE. Deciphering Blood Cells-Method for Blood Cell Analysis using Microscopic Images. *Journal of Modern Technology*. 2024 Sep 8:9-18. Available from: <https://doi.org/10.71426/jmt.v1.i1.pp9-18>
- [32] Kalnoor G, Dasari KS, Suma S, Waddenkery N, B. Pragathi. Enhanced Brain Tumor Detection from MRI Scans Using Frequency Domain Features and Hybrid Machine Learning Models. *Journal of Modern Technology*. 2025 Jan;1(2):141-9. Available from: <https://doi.org/10.71426/jmt.v1.i2.pp141-149>